




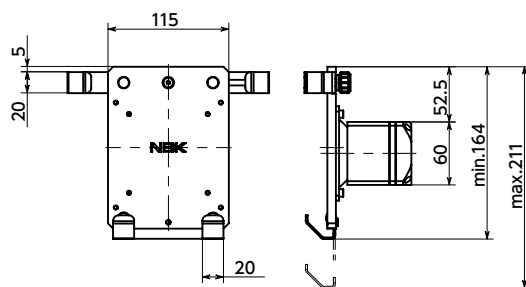

Structure

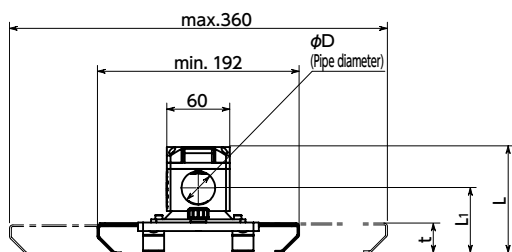

Material/Finish

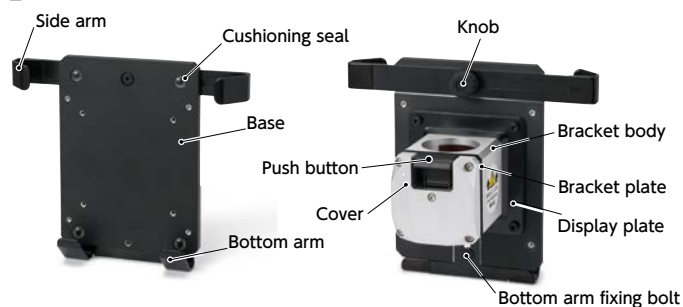

	DTAC-PB
Base	Aluminum Alloy Electrostatic Coating
Side Arm	SPHC
Bottom Arm	Electrostatic Coating Nylon Coating (Tip Only)
Knob	Nylon 6
Knob Thread Part	S45C Trivalent Chromate Treatment
Bottom Arm Fixing Bolt	SCM435 Ferrosoferric Oxide Film
Cushioning Seal	Polyurethane
Display Plate	SPHC Electrostatic Coating
Bracket Body	A6063 Anodized
Cover	A6063 Anodized
Bracket Plate	Polyacetal (Black)
Push Button	Polyacetal (Black)

- Holder for mounting tablet PCs to vertical axis round pipes/round shafts.
- Mounting to round pipes/round shafts uses **CUPB** (➡ P.xxxx) for simple positioning.
- Push the push button to unlock the lock, smoothly move the bracket vertically, and release the push button to fix it in position.
- It can be moved upward without pushing the push button, just by applying force.
- Load capacity of up to 5 kg.
- Tablet PCs between 9 and 12 inches*1 can be mounted by adjusting the side arm and bottom arm.

*1 : 9-inch and 10-inch tablet PCs can only be installed horizontally.

- Select the model number depending on the thickness of the tablet PC to be mounted.
Tablet PC Thickness
6 - 13 mm — **DTAC-13-330-PB-**-BK**
13 - 20 mm — **DTAC-20-330-PB-**-BK**
- The nylon coating on the arm tip and the cushioning seal on the base prevent the tablet PC from being scratched.

Application

Machine tool / Medical equipment / FPD production device / Semiconductor manufacturing device / Packing machine / Food machinery

Specifications

	DTAC-**-330-PB-30-BK	DTAC-**-330-PB-40-BK
Applicable Round Pipe/Round Shaft Diameter	φ30±0.64	φ40±0.64
Push Button Press Count Resistance*1	20,000 Times	

*1 : Values are for reference only. They are not guaranteed values.

Unit : mm

Part Number 1	Supported Tablet PCs*1			D	L ₁	L	t	Max. Load Weight (kg)	Mass (g)
	Thickness min./max.	Width min./max.	Height min.						
DTAC-13-330-PB-30-BK	6 / 13	190 / 330	155	30	63	102	28	5	1135
DTAC-13-330-PB-40-BK	6 / 13	190 / 330	155	40	68	112	28	5	1126
DTAC-20-330-PB-30-BK	13 / 20	190 / 330	155	30	70	109	35	5	1143
DTAC-20-330-PB-40-BK	13 / 20	190 / 330	155	40	75	119	35	5	1153

*1 : Some tablet PC models may not be mountable. We will lend sample models to confirm that your device can be mounted. Please contact our customer service.

Precautions for Use

- Mount to a vertical axis.
- **DTAC-PB** requires vertical mounting. If mounted upside-down, **DTAC-PB** cannot remain fixed onto round pipes/round shafts.
- It will prevent rotating movements, but it will not be able to remain completely fixed.
- **DTAC-PB** is a product that uses friction fastening. In cases where oil, etc. adhered to the round pipe/round shaft causes the friction coefficient to decrease or if impact loads or vibrations occur, the maximum load weight may decrease.
- The surface may be scratched depending on the material and surface finish of the round pipe/round shaft.
- If excessive loads are applied, then the round pipe/round shaft may be scratched or **DTAC-PB** may be damaged.

Part number specification


DTAC-13-330-PB-30-BK



DTAC-PB Tablet PC Holders - Quick Positioning Type - For Round Pipes Patent Pending




● Round Pipe/Round Shaft Mounting Method

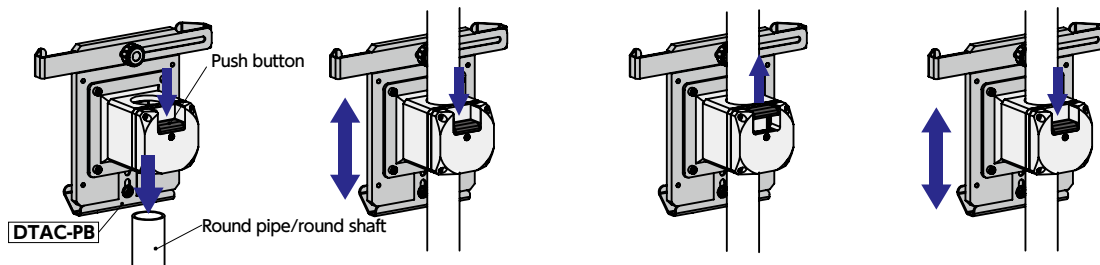


- 1 Push the **DTAC-PB** button, and insert onto the round pipe/round shaft in the unlocked state.
- 2 While continuing to push the button, move **DTAC-PB** to the position it should be fixed.
- 3 Release the push button to fix **DTAC-PB** in place.
- 4 Pushing the button again enables **DTAC-PB** to be moved to the desired position.

● Tablet PC Mounting Method

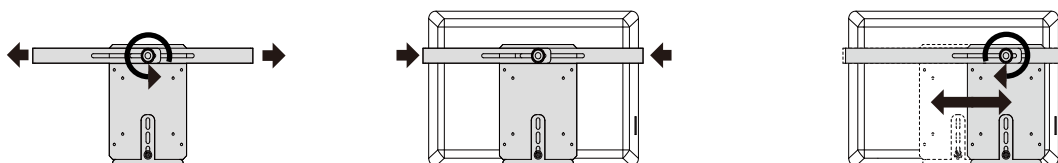

- 1 Loosen the rear knob to freely move the side arms.
- 2 Insert the tablet PC and push the side arms from both sides to secure it. Secure firmly so that the cushioning seal touches the tablet PC closely.
- 3 Adjust the positions of the arms if they interfere with the tablet PC ports. Tighten the rear knob to complete mounting.* 1

● Height Adjustment Method

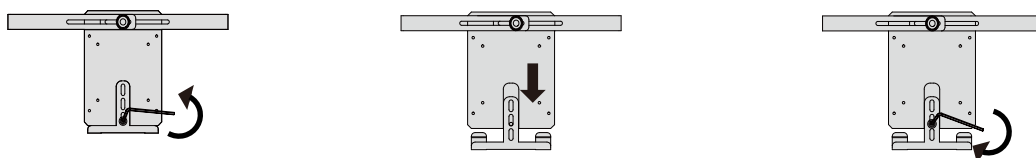

- 1 Loosen the bottom arm fixing bolt with a hex wrench to remove.
- 2 Adjust the bottom arm to the desired position.
- 3 Firmly tighten the bottom arm fixing bolt with a hex wrench.* 1

* 1 : The tablet PC may fall out of the holder if not tightened sufficiently.