

\* :  $D_1 < D(B \leq 12)$   
 $D_1 \geq D(B \geq 13)$

#### ● Application


For narrow areas where screws cannot be retained by hand, during assembly/maintenance of devices, equipment, vehicles and so on  
 For preventing screws from falling into devices, such as food processing equipment where mechanical parts must be excluded, during maintenance

#### ● Material/Finish

	SKCK
Main Body	SCM435 Nickel Chrome Plating
Wire Ring	SWPA
Ball	SWCH




- A socket which holds hex head screws/bolts and hex nuts.
- The two balls pressed into the wire ring facing inwards hold hex head screws/bolts and hex nuts within the socket and prevent falling.

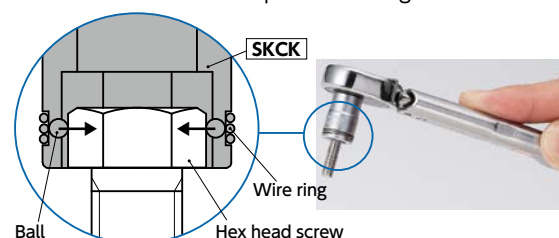

- Unlike magnetic holding methods, it can be used with hex head screws/bolts and hex nuts of any material. There is also no adherence of foreign matter due to socket magnetism.
- It can be used just like ordinary sockets.
- There are 2 types of insertion angles.


**SKCK-\*\*-6.35** — Insertion Angle 6.35

**SKCK-\*\*-9.5** — Insertion Angle 9.5


Part Number 	B Nominal of Width Across Flats	Lb Insertion Angle	t	D	D1	L	Unit : mm
							Mass (g)
<b>SKCK-7-6.35</b>	7	6.35	4	11.3	11.2	18	8
<b>SKCK-8-6.35</b>	8	6.35	5	12.3	11.2	18	9
<b>SKCK-10-9.5</b>	10	9.5	6	14.5	17.3	26	24
<b>SKCK-12-9.5</b>	12	9.5	7	16.8	17.3	26	26
<b>SKCK-13-9.5</b>	13	9.5	8	18	17	26	28
<b>SKCK-14-9.5</b>	14	9.5	8.5	19.5	18.5	27	34
<b>SKCK-17-9.5</b>	17	9.5	9.5	23.3	21.5	28	62

#### ● Usage example

For mounting and removal of screws in deep areas where hex head screws/bolts and hex nuts cannot be retained by hand.

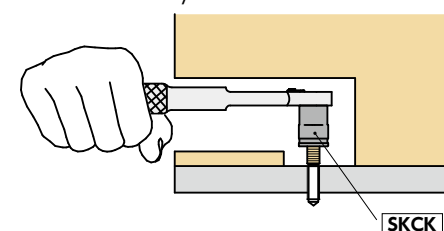

When mounting or removing hex head screws/bolts and hex nuts in narrow vertical areas, use a commercially available extension bar.

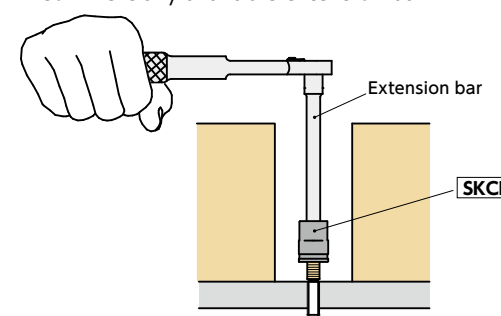

#### ⚠ Precautions for Use

- Use a size matching the nominal of width across flats.
- Retention may not be possible according to the dimensions and specifications of the hexagon.
- Insert firmly until hex head screws/bolts and hex nuts are retained.
- Do not use together with power tools like impact wrenches.
- Do not use in locations exposed to live wires, as it is made of metal.
- Do not use for any applications other than for turning screws.

#### ● Part number specification

**SKCK-7-6.35**

