

- Hex socket head cap screw with low head.
- For space-saving of equipment/devices and applications with limited overhead space.
- Use a dedicated wrench **SKP** for mounting and removing. As the pilot recess guides securely, you can tighten at higher torque more safely. (Commercially available hex keys can also be used for tightening.)

• Application

Reducing the size of equipment and devices

• Material/Finish




	SLP
Main Body	Equivalent to S45C Ferrosferic Oxide Film (Black)
Strength Class	8.8

Unit : mm

Part Number	M (Coarse) Nominal of Thread	Pitch	L	D1	L1	B	t	Lb	Max. Torque (N · m)	Mass (g)	Qty per Pack
SLP-M4	M4	0.7	8	7	2.8	3	1.6	3.5	2	1.3 - 1.4	20
SLP-M5	M5	0.8		8.5	3.5	4	2	4.2	6	2 - 3.3	20
SLP-M6	M6	1		10	4	5	2.5	5.5	9	3.5 - 5.3	20
SLP-M8	M8	1.25		13	5	6	3	7	20	7.8 - 10	20

• When purchasing less volume than one full bag, a separate handling fee is charged. For details, see the Sold Separately Service.

• Dedicated Wrench

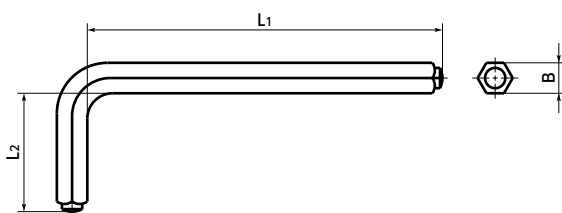


Unit : mm

Part Number	B Nominal of Width Across Flats	L1	L2	Applicable Screw	Mass (g)
SKP-3	3	63	20	SLP-M4	5
SKP-4	4	71	25	SLP-M5	10
SKP-5	5	80	28	SLP-M6	28
SKP-6	6	90	32	SLP-M8	34

• Part number specification

SLP-M6-20



1 Individual Sales → P. xxxxx	Cleanroom Wash & Packaging → P. xxxxx	Screw Length Adjustment → P. xxxxx	Vibration Resistant → P. xxxxx	Modification process for captive use → P. xxxxx
Available / Add'l charge	Not Available	Available / Add'l charge	Available / Add'l charge	Not Available