




- Set collar for securing bearing.
- It can be fixed by pressing the bearing inner wheel only on the convex of the main body.
- Optimal for securing bearing when it is difficult to fix the snap ring, etc. to the shaft.
- It is attached to the shaft by the set screws.

| Material/Finish      |        |
|----------------------|--------|
| NSC-SB               |        |
| Main Body            | SUS304 |
| Hex Socket Set Screw | SUSXM7 |

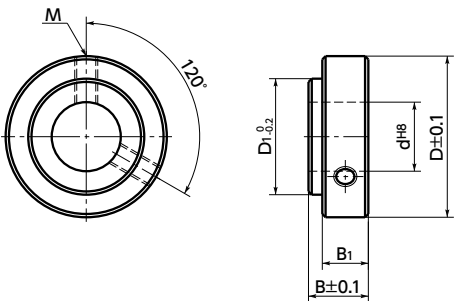

| Unit : mm     |    |     |    |    |      |             |                     |          |
|---------------|----|-----|----|----|------|-------------|---------------------|----------|
| Part Number   | d  | B   | B1 | D  | D1   | M(coarse)*1 | Applicable bearings | Mass (g) |
| NSC-3-7-SB    | 3  | 7.5 | 5  | 7  | 5    | M3          | 693ZZ・623ZZ         | 2        |
| NSC-4-7-SB    | 4  | 7.5 | 5  | 8  | 6    | M3          | 694ZZ・624ZZ         | 2        |
| NSC-5-7-SB    | 5  | 7.5 | 5  | 11 | 7.2  | M3          | 695ZZ・605ZZ・625ZZ   | 3        |
| NSC-6-7-SB1   | 6  | 7.5 | 5  | 13 | 8.4  | M3          | 606ZZ               | 4        |
| NSC-6-7-SB2   | 6  | 7.5 | 5  | 13 | 9.2  | M3          | 626ZZ               | 5        |
| NSC-6-7-SB3   | 6  | 7.5 | 5  | 13 | 8    | M3          | 696ZZ               | 4        |
| NSC-8-9-SB1   | 8  | 9.5 | 7  | 18 | 11.7 | M4          | 608ZZ               | 12       |
| NSC-8-9-SB2   | 8  | 9.5 | 7  | 18 | 11.4 | M4          | 628ZZ               | 12       |
| NSC-8-9-SB3   | 8  | 9.5 | 7  | 18 | 10.4 | M4          | 698ZZ               | 11       |
| NSC-10-11-SB1 | 10 | 11  | 8  | 20 | 14.2 | M5          | 6000ZZ              | 16       |
| NSC-10-11-SB2 | 10 | 11  | 8  | 20 | 16.7 | M5          | 6200ZZ              | 18       |
| NSC-10-11-SB3 | 10 | 11  | 8  | 20 | 13.2 | M5          | 6900ZZ              | 16       |
| NSC-12-11-SB1 | 12 | 11  | 8  | 22 | 17.2 | M5          | 6001ZZ              | 19       |
| NSC-12-11-SB2 | 12 | 11  | 8  | 22 | 17.7 | M5          | 6201ZZ              | 19       |
| NSC-12-11-SB3 | 12 | 11  | 8  | 22 | 15.2 | M5          | 6901ZZ              | 18       |
| NSC-15-11-SB1 | 15 | 11  | 8  | 25 | 20.2 | M5          | 6002ZZ              | 22       |
| NSC-15-11-SB2 | 15 | 11  | 8  | 25 | 21.2 | M5          | 6202ZZ              | 23       |
| NSC-15-11-SB3 | 15 | 11  | 8  | 25 | 18.7 | M5          | 6902ZZ              | 21       |

\*1 : Hex socket set screw is provided.  
\*1 : If d dimension is 5 or below, one point.



| Unit : mm     |    |      |    |    |      |             |                     |          |
|---------------|----|------|----|----|------|-------------|---------------------|----------|
| Part Number   | d  | B    | B1 | D  | D1   | M(coarse)*1 | Applicable bearings | Mass (g) |
| NSC-17-13-SB1 | 17 | 13   | 10 | 28 | 22.2 | M6          | 6003ZZ              | 33       |
| NSC-17-13-SB2 | 17 | 13   | 10 | 28 | 24.2 | M6          | 6203ZZ              | 35       |
| NSC-17-13-SB3 | 17 | 13   | 10 | 28 | 20.2 | M6          | 6903ZZ              | 32       |
| NSC-20-13-SB1 | 20 | 13   | 10 | 35 | 25.2 | M6          | 6004ZZ              | 54       |
| NSC-20-13-SB2 | 20 | 13   | 10 | 35 | 27.2 | M6          | 6204ZZ              | 55       |
| NSC-20-13-SB3 | 20 | 13   | 10 | 35 | 24.7 | M6          | 6904ZZ              | 53       |
| NSC-25-13-SB1 | 25 | 13.5 | 10 | 38 | 31.2 | M6          | 6005ZZ              | 56       |
| NSC-25-13-SB2 | 25 | 13.5 | 10 | 38 | 33.2 | M6          | 6205ZZ              | 59       |
| NSC-25-13-SB3 | 25 | 13.5 | 10 | 38 | 30.2 | M6          | 6905ZZ              | 55       |
| NSC-30-15-SB1 | 30 | 15.5 | 12 | 45 | 38.2 | M8          | 6006ZZ              | 92       |
| NSC-30-15-SB2 | 30 | 15.5 | 12 | 45 | 40.2 | M8          | 6206ZZ              | 95       |
| NSC-30-15-SB3 | 30 | 15.5 | 12 | 45 | 35.2 | M8          | 6906ZZ              | 87       |
| NSC-35-16-SB1 | 35 | 16.5 | 12 | 50 | 43.2 | M8          | 6007ZZ              | 108      |
| NSC-35-16-SB2 | 35 | 16.5 | 12 | 50 | 46.2 | M8          | 6207ZZ              | 116      |
| NSC-35-16-SB3 | 35 | 16.5 | 12 | 50 | 41.2 | M8          | 6907ZZ              | 102      |
| NSC-40-18-SB1 | 40 | 18.5 | 14 | 60 | 48.2 | M10         | 6008ZZ              | 185      |
| NSC-40-18-SB2 | 40 | 18.5 | 14 | 60 | 52.2 | M10         | 6208ZZ              | 196      |
| NSC-40-18-SB3 | 40 | 18.5 | 14 | 60 | 46.2 | M10         | 6908ZZ              | 180      |

\*1 : Hex socket set screw is provided.  
\*1 : If d dimension is 5 or below, one point.

- Part number specification

NSC-4-7-SB



|                                     |                                  |                              |                          |
|-------------------------------------|----------------------------------|------------------------------|--------------------------|
| Cleanroom Wash & Packaging ➡ P.0000 | Screw Length Adjustment ➡ P.0000 | Vibration Resistant ➡ P.0000 | Laser Marking ➡ P.0000   |
| Available / Add'l charge            | Not Available                    | Not Available                | Available / Add'l charge |