


SNZCXS-ALK Hexalobular Socket Extra Low Profile Miniature Screw / Nylon Patch

SUS Stainless steel Protrusion Vibration resistant treatment Miniature Size

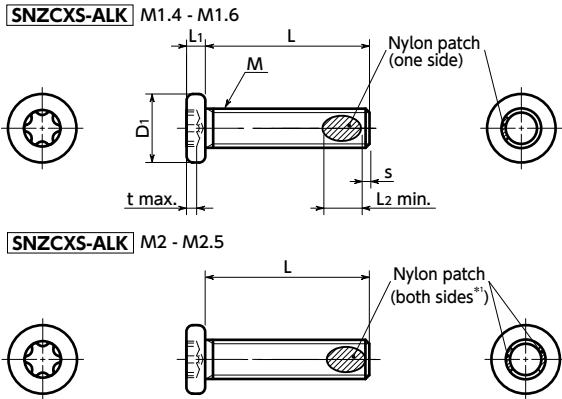

* 1 : For dimension L of under 4 mm, nylon adhesion is on one side.

Material/Finish

	SNZCXS-ALK
Main Body	SUSXM7 (Equivalent to SUS304)
Nylon Adhesion	Nylon 11

Part Number Specification

SNZCXS-M2-3-ALK

1 2 1





- M1.4-M2.5. Miniature screw with nylon adhesion for precision instruments.
- The friction of the nylon adhered to the thread suppresses the return rotation of the thread, preventing the screw from falling out even if the tightening force decreases.
- Flat head machine screw type with low head height. For space-saving of equipment/devices and applications with limited overhead space.
- Screw heads are unlikely to be damaged due to tightening, allowing safe and secure tightening to be performed.
- Install and remove with SKX Dedicated Wrench or SKXB Dedicated Bit and SRD Dedicated Magnetic Screwdriver together.

Part Number	Applicable Wrench	Applicable Bit
SNZCXS-M1.4-ALK	-	SKXB-3
SNZCXS-M1.6-ALK	SKX-4	SKXB-4
SNZCXS-M2-ALK	SKX-5	SKXB-5
SNZCXS-M2.5-ALK	SKX-6	SKXB-6

- Use the SKX-N hexalobular wrench for extremely limited access spaces for mounting and removing in tight spaces.
- We manufacture products with special specifications such as ventilation holes, cleanroom washing and special packaging.
- Application

Reducing the size of equipment and devices / Return and fall prevention of screws
Compact precision equipment

																			Unit : mm
Part Number 	M (Coarse)		L 							D1	L1	s*1	L2 min.	Hexalobular Socket No.	t max.	Max. Torque (N・m)	Mass (g)	Qty per Pack	
	Nominal of Thread	Pitch																	
SNZCXS-M1.4-ALK	M1.4	0.3	2	3	4	5	6	8	10	2	0.5	0.6	1.4	3	0.25	0.03	0.025 - 0.091	50	
SNZCXS-M1.6-ALK	M1.6	0.35	2	3	4	5	6	8	10	2.4	0.5	0.7	1.6	4	0.3	0.05	0.041 - 0.12	50	
SNZCXS-M2-ALK	M2	0.4	2	3	4	5	6	8	10	3	0.6	0.8	2	5	0.35	0.12	0.063 - 0.2	50	
SNZCXS-M2.5-ALK	M2.5	0.45		3	4	5	6	8	10	4	0.8	0.9	2.5	6	0.55	0.24	0.12 - 0.34	50	

* 1 : If L<4, dimension s is 0.

- When purchasing less volume than one full bag, a separate handling fee is charged. For details, see the Sold Separately Service.

1 Individual Sales	Cleanroom Wash & Packaging	Screw Length Adjustment	Vibration Resistant	Modification process for captive use
Available / Add'l charge	Available / Add'l charge	Not Available	Not Available	Not Available

Related Products

SKX Hexalobular Wrench



SKX-N Hexalobular Wrench for Extremely Limited Access Spaces



SKXB Hexalobular Short Bit



SRD Magnet Screwdriver

