
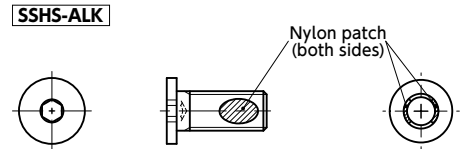


SSH-EL-ALK / SSHS-ALK Hex Socket Head Cap Screws with Special Low Profile (Nylon Patch)

SUS Stainless steel Protrusion

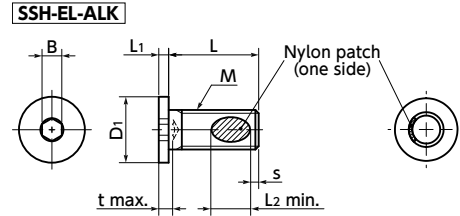

- The friction of the nylon adhered to the thread suppresses the return rotation of the thread.
- Even if the tightening force is lost, the return rotation is suppressed, preventing the screws from falling off.
- All head heights are 1.5mm or less.
- For space-saving of equipment/devices and applications with limited overhead space.

Application

Reducing the size of equipment and devices / Return and fall prevention of screws

Material/Finish



	SSH-EL-ALK	SSHS-ALK
Main Body	SCM435 Electroless Nickel Plating	SUSXM7 (Equivalent to SUS304)
Nylon Patch	Nylon 11	Nylon 11
Strength Class	Thread Part: 10.9 Head *1: 5.8 (M2 - M8) 4.8 (M10)	A2-50

*1: Do not exceed the max. tightening torque. Though strength is increased through heat treatment, the head strength is less than that of thread.

SSH-EL-ALK Made of Steel

Unit : mm

Part Number ¹	M (Coarse)		L ²								D1	L1	B	t	s*1	L2	Max. Tightening Torque *2 (N·m)	Mass (g)	Qty per Pack	
	Nominal of Thread	Pitch	4	5	6	8	10	12	16	20										
SSH-M2-EL-ALK	M2	0.4	4	5	6	8	10	12			4	1.1	1.3	1.2	0.8	1.6	0.24	0.14 - 0.32	10	
SSH-M2.5-EL-ALK	M2.5	0.45	4	5	6	8	10	12			5	1.3	1.3	1.5	0.9	2	0.4	0.25 - 0.49	10	
SSH-M3-EL-ALK	M3	0.5	4	5	6	8	10	12			6	1.3	1.5	2	1	2.5	0.7	0.39 - 0.72	10	
SSH-M4-EL-ALK	M4	0.7			6	8	10	12	16	20		8	1.5	2	2.5	1.4	3.3	1.7	0.93 - 1.9	10
SSH-M5-EL-ALK	M5	0.8			6	8	10	12	16	20	25	9	1.5	3	3	1.6	4.2	4.2	1.1 - 3.5	10
SSH-M6-EL-ALK	M6	1			6							10	1.5	3	4	0	5	6.3	1.5 - 5.8	10
SSH-M6-EL-ALK	M6	1			8	10	12	16	20	25	30	10	1.5	3	4	2	5	6.3	1.5 - 5.8	10
SSH-M8-EL-ALK	M8	1.25			8							13	1.5	4	5	0	6.7	14	3.3 - 10	10
SSH-M8-EL-ALK	M8	1.25				10	12	16	20	25	30	13	1.5	4	5	2.5	6.7	14	3.3 - 10	10

*1: Dimension s of SSH-M6-6-EL-ALK and SSH-M8-8-EL-ALK is 0.

*2: Values in chart are for reference only. They are not guaranteed values.

• When purchasing less volume than one full bag, a separate handling fee is charged. For details, see the Sold Separately Service.

SSHS-ALK Made of Stainless Steel

Unit : mm

Part Number ¹	M (Coarse)		L ²								D1	L1	B	t	s*1	L2	Max. Tightening Torque *2 (N·m)	Mass (g)	Qty per Pack	
	Nominal of Thread	Pitch	4	5	6	8	10	12	16	20										25
SSHS-M2-ALK	M2	0.4	4	5	6	8	10	12				4	1.1	1.3	1.2	0.8	1.6	0.12	0.33 - 0.51	10
SSHS-M2.5-ALK	M2.5	0.45	4	5	6	8	10	12				5	1.3	1.3	1.5	0.9	2	0.24	0.26 - 0.5	10
SSHS-M3-ALK	M3	0.5	4	5	6	8	10	12				6	1.3	1.5	2	1	2.5	0.43	0.39 - 0.72	10
SSHS-M4-ALK	M4	0.7			6	8	10	12	16			8	1.5	2	2.5	1.4	3.3	1	0.94 - 2	10
SSHS-M5-ALK	M5	0.8			6	8	10	12	16	20	25	9	1.5	3	3	1.6	4.2	2.1	1.1 - 3.5	10
SSHS-M6-ALK	M6	1			6							10	1.5	3	4	0	5	3.5	1.4 - 5.7	10
SSHS-M6-ALK	M6	1			8	10	12	16	20	25	30	10	1.5	3	4	2	5	3.5	1.4 - 5.7	10
SSHS-M8-ALK	M8	1.25			8							13	1.5	4	5	0	6.7	8.6	3.3 - 10	10
SSHS-M8-ALK	M8	1.25				10	12	16	20	25	30	13	1.5	4	5	2.5	6.7	8.6	3.3 - 10	10

*1: Dimension s of SSHS-M6-6-ALK and SSHS-M8-8-ALK is 0.

*2: Values in chart are for reference only. They are not guaranteed values.

• When purchasing less volume than one full bag, a separate handling fee is charged. For details, see the Sold Separately Service.

- Part number specification

SSH-M5-20-EL-ALK



Individual Sales → P.0000	Cleanroom Wash & Packaging → P.0000	Screw Length Adjustment → P.0000	Vibration Resistant → P.0000	Modification process for captive use → P.0000
Available / Add'l charge	S.S. only/ Add'l charge	Not Available	Not Available	Not Available