

Material/Finish

	SRFXS
Main Body	Equivalent to SUS304
Strength Class	Equivalent to A2-50



- Flat head bolt with a pin at the center of the hexalobular socket *1.
- This prevents mounting and removing with regular tools.
- Install and remove with **SRX** Dedicated Wrench or **SRXB** Dedicated Bit and **SRD** Dedicated Magnetic Screwdriver together.

*1 : The hexalobular shape is prescribed by JIS B 1015: 2008(ISO 10664: 2005)"Hexalobular internal driving feature for bolts and screws".

Application

Machinery / Tools / Equipment / Devices disassembly prevention/ Tampering prevention / Theft prevention for outdoor facilities / Security measures / Safety measures


Part Number	M (Coarse)		L								D1	L1	Applicable Wrench Type	Applicable Bit Type		Hexalobular Socket No.	Mass (g)	Qty per Pack
	Nominal of Thread	Pitch	6	8	10	12	16	20	25	30				Bit	Driver			
SRFXS-M3	M3	0.5	6	8	10	12					6	1.75	SRX-10	SRXB-10	SRD-6.35	10	0.48 - 0.72	10
SRFXS-M4	M4	0.7		8	10	12	16	20			8	2.3	SRX-20	SRXB-20	SRD-6.35	20	1 - 1.9	10
SRFXS-M5	M5	0.8			10	12	16	20	25		10	2.8	SRX-25	SRXB-25	SRD-6.35	25	2.1 - 3.9	10
SRFXS-M6	M6	1			10	12	16	20	25	30	12	3.4	SRX-30	SRXB-30	SRD-6.35	30	3.3 - 7	10

When purchasing less volume than one full bag, a separate handling fee is charged. For details, see the Sold Separately Service.

SRX Dedicated Wrench


Unit : mm

Part Number	L1	L2	Mass (g)
SRX-10	60	20	3.7
SRX-20	67	23	8.2
SRX-25	70	25	11
SRX-30	81	28	20

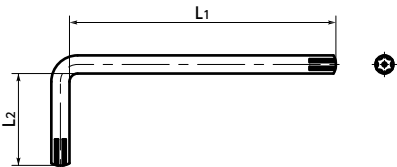

SRXB Bit Part No.


Part Number	Mass (g)
SRXB-10	4.36
SRXB-20	4.57
SRXB-25	4.79
SRXB-30	5.50

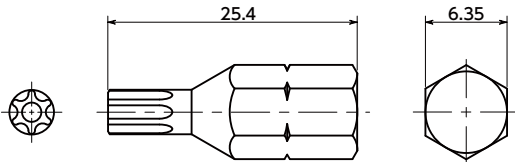

SRD Dedicated magnet screwdriver

Unit : mm

Part Number	L	B	Mass (g)
SRD-6.35	210	6.35	98

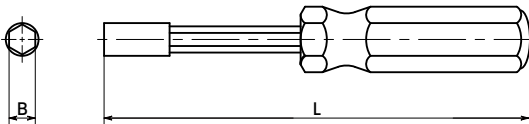

Related Products

Washer for Flat Head Screw
SWAS-RW is available.



Part number specification

SRFXS-M5-16

1

2