




# SRWS Triwing Pan Head Machine Screws

Tamper Resistance **SUS** Stainless steel

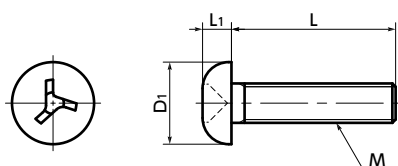

- This prevents mounting and removing with regular tools.
- Install and remove with **SRWB** Dedicated Bits and **SRD** Dedicated Magnetic Screwdriver together.

## Application

Machinery / Tools / Equipment / Devices disassembly prevention / Tampering prevention / Theft prevention for outdoor facilities / Security measures / Safety measures

## Material/Finish



	SRWS
Main Body	Equivalent to SUS304
Strength Class	Equivalent to A2-50

Unit : mm

Part Number	M (Coarse)		L						D1	L1	Bit Part No.	Screwdriver Part No.	Mass (g)	Qty per Pack
	Nominal of Thread	Pitch	6	8	10	12	16	18						
<b>SRWS-M3</b>	M3	0.5							5.6	1.8	SRWB-2	SRD-6.35	0.54 - 0.7	20
<b>SRWS-M4</b>	M4	0.7							8.2	2.9	SRWB-4	SRD-6.35	1.5 - 1.9	20
<b>SRWS-M5</b>	M5	0.8							9.5	3.4	SRWB-5	SRD-6.35	2.8 - 3.5	20

- When purchasing less volume than one full bag, a separate handling fee is charged. For details, see the Sold Separately Service.

## SRWB Dedicated Bit

Unit : mm

Part Number	L	B	Mass (g)
<b>SRWB-2</b>	25.4	6.35	4.8
<b>SRWB-4</b>	25.4	6.35	5.2
<b>SRWB-5</b>	25.4	6.35	5.6

**SRWB**




## SRD Dedicated Magnet Screwdriver

Unit : mm

Part Number	L	B	Mass (g)
<b>SRD-6.35</b>	210	6.35	98

**SRD**

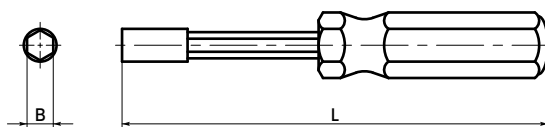

## Part number specification

**SRWS-M5-16**



1 Individual Sales → P.0000	Cleanroom Wash & Packaging → P.0000	Screw Length Adjustment → P.0000	Vibration Resistant → P.0000	Modification process for captive use → P.0000
Available / Add'l charge	Available / Add'l charge	Available / Add'l charge	Available / Add'l charge	Available / Add'l charge