


SVSL Hex Socket Head Cap Screws with Ventilation Hole - SUS316L




Vacuum
 Cleanroom wash & packaging
 Heat-resistance
 SUS Stainless steel

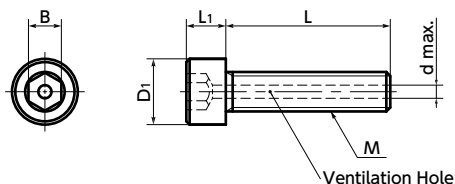

● Usage example

Gas trapped at the bottom of a screw hole is released through **SVSL**, and gas trapped in a drilled hole is released through **SWAS-VF** (→ P.xxxx).

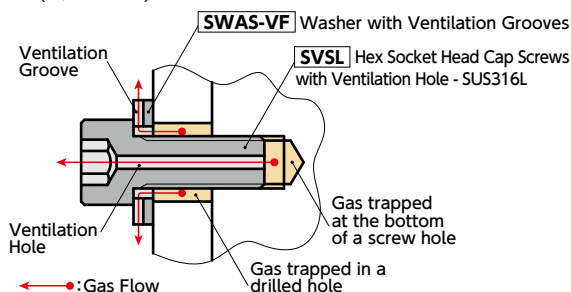

- Made of SUS316L. Excellent corrosion resistance.
- The ventilation hole easily releases gas trapped in the screw holes of equipment and machines, and supports vacuum drawing of vacuum devices.
- Cleanroom wash and cleanroom packing are completed. → P.xxxx

● Application

Vacuum devices, vacuum chambers, FPD production equipment, semiconductor devices, and electron microscopes

● Material/Finish



	SVSL
Main Body	SUS316L
Strength Class	A4-70

Unit : mm

Part Number 1	M (Coarse)		L 2												D1	L1	B	d	Mass (g)	Qty per pack
	Nominal of Thread	Pitch	5	6	8	10	12	16	20	25	30	35	40	45						
SVSL-M3	M3	0.5	5	6	8	10	12	16	20	25					5.5	3	2.5	1.2	0.67 - 1.2	20
SVSL-M4	M4	0.7	5	6	8	10	12	16	20	25					7	4	3	1.5	1.4 - 3.2	20
SVSL-M5	M5	0.8		6	8	10	12	16	20	25					8.5	5	4	1.5	2.2 - 4.8	10
SVSL-M6	M6	1			8	10	12	16	20	25	30				10	6	5	2	4.3 - 8.3	10
SVSL-M8	M8	1.25					12	16	20	25	30	35			13	8	6	2	11 - 19	10
SVSL-M10	M10	1.5						16	20	25	30	35	40		16	10	8	3	21 - 33	5
SVSL-M12	M12	1.75									30	35	40	45	18	12	10	3	39 - 50	5

- When purchasing less volume than one full bag, a separate handling fee is charged. For details, see the Sold Separately Service.

● Related Products

For ventilation of drilled hole, please use **SWAS-VF**.
→ P.xxxx



● Part number specification

SVSL-M5-25

1

2

1 Individual Sales → P.xxxx	Cleanroom Wash & Packaging → P.xxxx	Screw Length Adjustment → P.xxxx	Vibration Resistant → P.xxxx	Modification process for captive use → P.xxxx
Available / Add'l charge	Cleanroom washed and packed	Available / Add'l charge	Not Available	Please feel free to contact us