




- A strong type clamping lever.
- Products of special specifications such as rotating radius of the lever can also be manufactured.  
Please feel free to contact our customer service.

#### Material/Finish

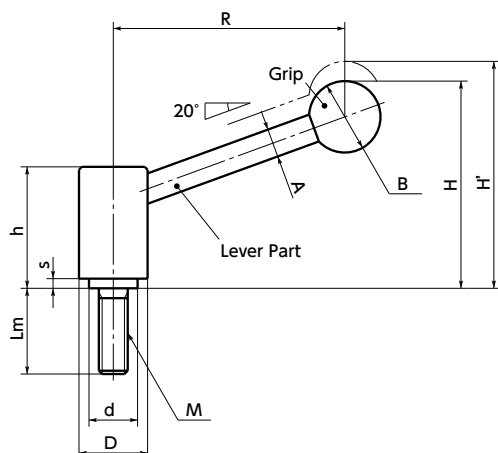

|             | <b>LTM</b>                               |
|-------------|------------------------------------------|
| Lever Part  | S45C<br>Ferrosoferric Oxide Film (Black) |
| Thread Part | S45C<br>Ferrosoferric Oxide Film (Black) |
| Grip        | Phenol Resin (Black)                     |

## Dimensions

Unit : mm

| Part Number   | M (Coarse)        |       | R   | H     | H'  | h    | s   | A  | B  | D  | d  | Number of Teeth | Max. load*1 (N) | Max. clamping*1 force (kN) | Mass (g)  |
|---------------|-------------------|-------|-----|-------|-----|------|-----|----|----|----|----|-----------------|-----------------|----------------------------|-----------|
|               | Nominal of Thread | Pitch |     |       |     |      |     |    |    |    |    |                 |                 |                            |           |
| <b>LTM-10</b> | M10               | 1.5   | 81  | 72.5  | 78  | 42.5 | 2.5 | 10 | 25 | 24 | 17 | 24              | 280             | 16                         | 195 - 210 |
| <b>LTM-12</b> | M12               | 1.75  | 99  | 85.5  | 92  | 49.5 | 3.5 | 11 | 25 | 28 | 20 | 26              | 400             | 23                         | 300 - 320 |
| <b>LTM-16</b> | M16               | 2     | 118 | 98.5  | 106 | 55.5 | 3.5 | 12 | 30 | 33 | 24 | 36              | 830             | 43                         | 490 - 535 |
| <b>LTM-20</b> | M20               | 2.5   | 136 | 114.5 | 123 | 65.5 | 4.5 | 14 | 35 | 41 | 30 | 36              | 1400            | 67                         | 880 - 975 |

\*1 : About the definition of max. load / max. clamping force → P.xxxx

| Part Number   | Lm (mm) <b>2</b> |    |    |    |    |
|---------------|------------------|----|----|----|----|
|               | 30               | 40 | 50 | 60 | 80 |
| <b>LTM-10</b> | ●                | ●  | ●  |    |    |
| <b>LTM-12</b> | ●                | ●  | ●  | ●  |    |
| <b>LTM-16</b> | ●                | ●  | ●  | ●  |    |
| <b>LTM-20</b> |                  | ●  |    | ●  | ●  |

#### Part number specification

**LTM-10-40**
**1**
**2**

For **2** screw length Lm, select from the sizes marked with ● in the table.

|                                     |                            |                                  |                              |                          |
|-------------------------------------|----------------------------|----------------------------------|------------------------------|--------------------------|
| Cleanroom Wash & Packaging → P.xxxx | Screw Combination → P.xxxx | Screw Length Adjustment → P.xxxx | Vibration Resistant → P.xxxx | Laser Marking → P.xxxx   |
| Not Available                       | Not Available              | Not Available                    | Not Available                | Available / Add'l charge |