Structure

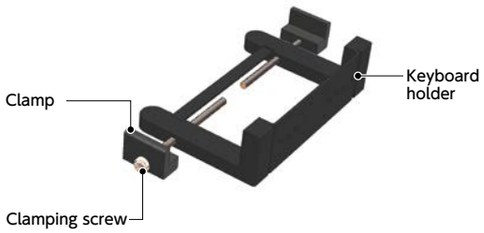

- The keyboard can be completely fixed to the mounting surface.
- By tightening the clamping screw, the keyboard is securely fixed and prevented from falling.
- B5 size laptops and 500 mm wide keyboards can be equipped.
- Three types of Mounting System for Display® are available for different types of mounting surfaces.
  1
  For aluminum frame /
  For wall panel and sheet metal—— **DKB**
  For aluminum frame end surface mounting— **DKB-AA**
  For Round Pipe—— **DKB-PB**
- Clamp screws of two sizes (Phillips cross recessed pan head machine screws) are supplied.
  M6 × 40: Used when the keyboard width is 256 mm to 280 mm.
  M6 × 140: Used when the keyboard width is 280 mm to 500 mm.

Material/Finish

RoHS

	DKB	DKB-AA / DKB-PB
Keyboard Holder	AC4C-F Electrostatic Coating	
Clamp	AC4C-F Electrostatic Coating	
Clamping Screw	SWRCH Trivalent Chromate Treatment	
Bracket	–	A6063 Anodized

Option

- A mouse holder **DKM** is available as an option.
- This may be mounted on either side.

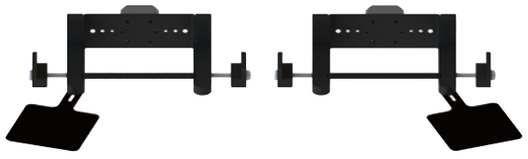

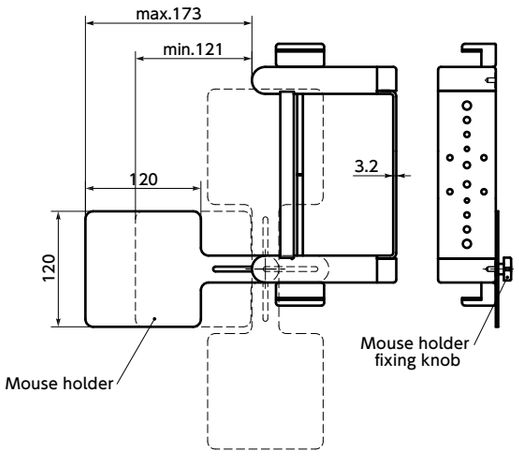

Part Number	Mass (g)
DKM	310

Material / Finish

RoHS

	DKM
Mouse Holder	SPCC Cation Painting
Mouse Holder Fixing Knob	Nylon 6

Application

Machine tool / Medical equipment / FPD production device / Semiconductor manufacturing device / Packing machine / Food machinery

Part number specification

DKB-500 - AA - 40

Product Code | 1 | 2

Example of part number: DKB-500 / DKB-500-PB-42.7

- For aluminum frame / For wall panel and sheet metal

DKB

- Mounting hole details



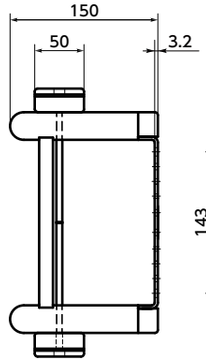

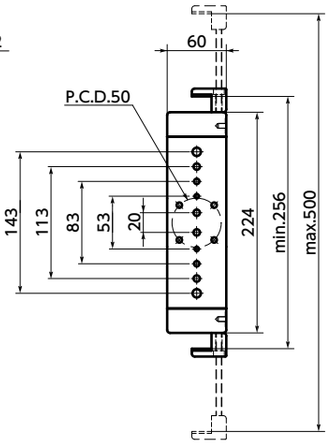

Part Number	Mass (g)
DKB-500	800

- For aluminum frame end surface mounting

DKB-AA

Unit : mm

Part Number	B 2	Mass (g)
DKB-500-AA-40	40	970

- Hex socket low head bolts (M8 × 16 mm) are supplied.





- For Round Pipe

DKB-PB

Unit : mm

Part Number	D 2	L1	L	Mass (g)
DKB-500-PB-**	28	174	198	1130
	30			1130
	34			1120
	40	178	206	1110
	42.7			1105

- Fixing rubber sheet is attached.