


DTAR-AF Tablet PC Holder

Alminum frame mount wall/panel Mount



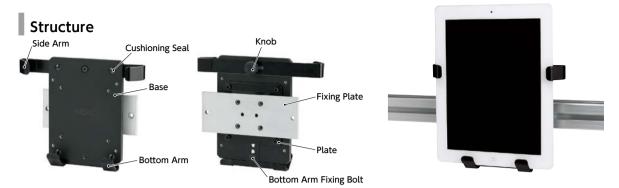





- A holder for mounting equipment and devices to tablet PCs.
- Can be mounted on aluminum frames, wall panels and sheet metal.
- Robust design. It has excellent durability.
- Tablet PCs between 9 and 12 inches*1 can be mounted by adjusting the side arm and bottom arm.
- Arm interference with the various tablet PC ports can be avoided by adjusting the side arm and bottom arm position.
- Select the model number depending on the thickness of the tablet PC to be mounted. Tablet PC Thickness

DTAR-13-330-AF-**-BK 6 - 13 mm 13 - 20 mm — DTAR-20-330-AF-**-BK

- The nylon coating on the arm tip and the cushioning seal on the base prevent the tablet PC from being scratched.
- *1: 9-inch and 10-inch tablet PCs can only be installed horizontally.
- Application


Machine tool / Medical equipment / FPD production device / Semiconductor manufacturing device / Packing machine / Food machinery

											Unit:mm
Part Number 1				M*1			_		Max. Load Weight	Mass	
Part Number	Thickness min. / max.	Width min. / max.	Height min.	(d) 2		Α	t	(kg)	(g)		
DTAR-13-330-AF-**-BK	6 / 13	190 / 330	155	M4 (5)	M5 (6)	M6 (7)	M8 (9)	47	28	5	1142
DTAR-20-330-AF-**-BK	13 / 20	190 / 330	155	M4 (5)	M5 (6)	M6 (7)	M8 (9)	54	35	5	1149

*1: Mounting screws are not supplied.

Material/Finish	₽ RoHS						
	DTAR-AF						
Base	Aluminum Alloy Electrostatic Coating						
Side Arm Bottom Arm	SPHC Electrostatic Coating Nylon Coating (Tip Only)						
Knob	Nylon 6						
Knob Thread Part	S45C Trivalent Chromate Treatment						
Bottom Arm Fixing Bolt	SCM435 Ferrosoferric Oxide Film						
Cushioning Seal	Polyurethane						
Plate	SPHC Electrostatic Coating						
Fixing Plate	SS400 Electrostatic Coating						

• Tablet PC Mounting Method




• Loosen the rear knob to freely

2 Insert the tablet PC and push the side arms from both sides to secure it. Secure firmly so that the cushioning

seal touches the tablet PC closely.


• Height Adjustment Method

move the side arms.




● Loosen the bottom arm fixing bolt with a hex wrench to remove.


*1: The tablet PC may fall out of the holder if not tightened sufficiently.



2 Adjust the bottom arm to the desired position.



3 Adjust the positions of the arms if they interfere with the tablet PC ports. Tighten the rear knob to complete mounting.*1



3 Firmly tighten the bottom arm fixing bolt with a hex wrench.*1

• Part number specification



