


D Offset Handwheels



Shaft bore process required

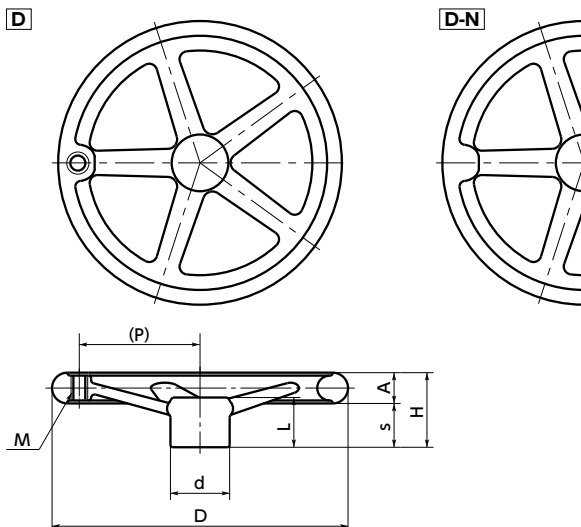

- Products with/without grip mounting holes can be selected by the end symbol of the part number. ➡
D — With grip mounting hole
D-N — Without grip mounting hole
- There is no grip supplied with this product. Order a grip separately. ➡ P.xxxx

Material/Finish

RoHS

	D
Main body	FC200 Chrome Plating

Unit : mm

Part Number With Grip Mounting Holes	M (Coarse) Nominal of Thread	Pitch	P	Part Number Without Grip Mounting Holes	D ➡ 1	H	A	s	d	L	Number of Spokes	Mass (g)
D-80	M5	0.8	27	D-80-N	80	36	14	22	24	24	3	430
D-100	M5	0.8	35.5	D-100-N	100	39	15	24	30	25	3	630
D-125	M6	1	46.5	D-125-N	125	40	16	24	33	28	3	755
D-140	M6	1	53.5	D-140-N	140	44	17	27	35	30	3	1360
D-150	M8	1.25	56	D-150-N	150	46	18	28	35	32	3	1410
D-160	M8	1.25	61	D-160-N	160	46	18	28	37	32	3	1200
D-200	M10	1.5	77	D-200-N	200	60	24	36	43	41	3	2250
D-250	M10	1.5	101.5	D-250-N	250	63	25	38	50	42	5	3710
D-300	M12	1.75	122	D-300-N	300	66	26	40	56	45	5	6150
D-315	M12	1.75	128.5	D-315-N	315	72	28	44	60	49	5	6650

Recommended applicable grip

Part Number	Recommended Applicable Grip*1	
	Plated Revolving Grip RM	Plated Fixing Grip SM
D-80		SM-5
D-100		SM-5
D-125	RM-6	SM-6
D-140	RM-6	SM-6
D-150	RM-8	SM-8
D-160	RM-8	SM-8
D-200	RM-10	SM-10
D-250	RM-10	SM-10
D-300	RM-12	SM-12
D-315	RM-12	SM-12

*1 : If a revolving grip other than the recommended applicable grip is used, the grip may not rotate.

Part number specification

D - 80-N

Product Code ➡ 1 ➡ 2

Cleanroom Wash & Packaging ➡ P.xxxx	Vibration Resistant ➡ P.xxxx	Laser Marking ➡ P.xxxx	Modification of Shaft Hole Diameter ➡ P.xxxx
Not Available	Not Available	Not Available	Available / Add'l charge