

- M1 - M2.5.

Miniature screws for precision instruments.

- Application

Reducing the size of equipment and devices
Compact precision instruments

- Material/Finish



	SNS	SNSS
Main Body	SCM435 Ferroferric Oxide Coating (Black)	SUSXM7 (Equivalent to SUS304)


Unit : mm

SNS Steel - Ferroferric Oxide Coating		SNSS Stainless steel		Common dimensions										Qty per Pack
Part Number	Max. Torque (N·m)	Part Number	Max. Torque (N·m)	M (Coarse)		L				D1	L1	B	Mass (g)	
				Nominal of Thread	Pitch									
		SNSS-M1	0.02	M1	0.25	2	3	4	5	2	1	0.9	0.025 - 0.039	10
		SNSS-M1.4	0.07	M1.4	0.3	2	3	4	5	2.6	1.4	1.3	0.062 - 0.085	10
SNS-M1.6	0.25	SNSS-M1.6	0.1	M1.6	0.35	3	4	5	6	3	1.6	1.5	0.09 - 0.12	10
SNS-M2	0.53	SNSS-M2	0.22	M2	0.4	3	4	5	6	3.8	2	1.5	0.16 - 0.22	10
SNS-M2-MS	0.53			M2	0.4	3	5			3.3	2	1.5	0.16 - 0.2	10
SNS-M2.5	1.12	SNSS-M2.5	0.46	M2.5	0.45	4	5	6	8	4.5	2.5	2	0.35 - 0.47	10

• When purchasing less volume than one full bag, a separate handling fee is charged. For details, see the Sold Separately Service.

- Usage example

For fixing miniature linear guideway rails and tables.

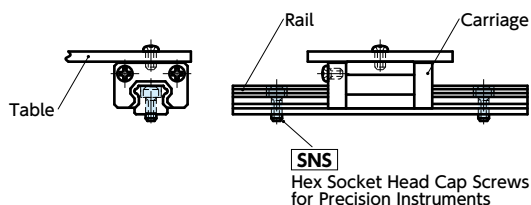

- Part number specification

SNS-M2-3-MS



Individual Sales	Cleanroom Wash & Packaging	Screw Length Adjustment	Vibration Resistant	Modification process for captive use
Available / Add'l charge	S.S. only/ Add'l charge	Available / Add'l charge	Available / Add'l charge	Not Available