FSP-200V-B-HSR

Zero point at the top

20 -

- 40 -

60 -

- 80 -

120


140-


160

180



SUS Stainless steel

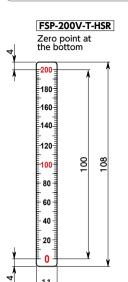

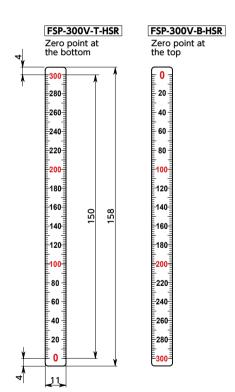

Thickness: approximately 0.55 mm

Part Number 1	Mass (g)
FSP-200V-T-HSR	4.8
FSP-200V-B-HSR	4.8
FSP-300V-T-HSR	7
FSP-300V-B-HSR	7

Scale Plate / Scale sticker Length Adjusutment Available / Add'l charge

• Vertical type scale plate scaled down by half.

• Values of 20/40/60... are displayed on a 10 mm/20 mm/30 mm... scale.

• By using it in a feed mechanism using doubleended screws to move in both directions, you can read the actual travel distance.

• As the adhesive tape is provided, you can simply stick it on machines / devices to use.

• Made of stainless steel. They have excellent corrosion resistance.

• Corners are rounded. It is hard to remove.

Material/Finish

**1** RoHS FSP-V-HSR Main body SUS304

Precautions for Use

• **FSP-V-HSR** Use the scale of the Scale Plate as a general guideline.

• Thoroughly remove oil and dust on the sticking surface before sticking.


• Avoid use in high-temperature/high-humidity environments, and do not leave moisture or oil adhered to the product. The scale part may peel

• Mounting hole processing is available upon request.





 Usage example For reading actual travel distance in feed mechanisms using double-ended screws to move in both directions. When the left-side table travels 10 mm, the right-side table also travels 10 mm, for a total of 20 mm travel. Using **FSP-V-HSR** enables confirmation of this total travel distance.

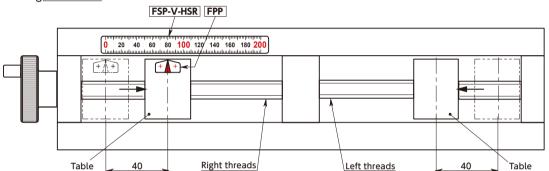

• Part number specification



