


SRSAS Button Head Cap Screws with Three - Lobe Holes (with Pin)



Tamper Resistance **SUS** Stainless steel

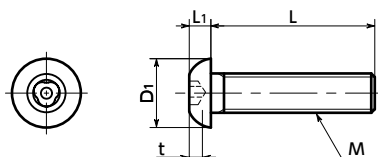

Material/Finish



	SRSAS
Main Body	Equivalent to SUS304
Strength Class	Equivalent to A2-50



- Button head cap screws with pin at the center of the three groove holes.
- This prevents mounting and removing with regular tools.
- Install and remove with **SRSAB** Dedicated Bits and **SRD** Dedicated Magnetic Screwdriver together.

Application

Machinery / Tools / Equipment / Devices disassembly prevention / Tampering prevention / Theft prevention for outdoor facilities / Security measures / Safety measures

Unit : mm

Part Number 1	M (Coarse)		L 2									D1	L1	t	Bit Part No.	Screwdriver Part No.	Mass (g)	Qty per Pack	
	Nominal of Thread	Pitch																	
SRSAS-M3	M3	0.5	6	8	10	12		20				5.7	1.65	0.9	SRSAB-3	SRD-6.35	0.43 - 1.1	10	
SRSAS-M4	M4	0.7	6	8	10	12	16	20	25	30		7.6	2.2	1.3	SRSAB-4	SRD-6.35	0.89 - 2.7	10	
SRSAS-M5	M5	0.8		8	10	12	16	20	25	30	40	10.5	3.3	1.6	SRSAB-56	SRD-6.35	2.4 - 6.6	10	
SRSAS-M6	M6	1			10	12	16	20	25	30	40	50	10.5	3.3	1.6	SRSAB-56	SRD-6.35	3.2 - 11	10
SRSAS-M8	M8	1.25				12	16	20	25	30	40	50	14	4.4	2.5	SRSAB-8	SRD-6.35	7.2 - 19	10


- When purchasing less volume than one full bag, a separate handling fee is charged. For details, see the Sold Separately Service.

SRSAB Dedicated bits

Unit : mm

Part Number	L	B	Mass (g)
SRSAB-3	32	6.35	5.9
SRSAB-4	32	6.35	7
SRSAB-56	32	6.35	7.3
SRSAB-8	32	6.35	8.3

SRSAB




SRD Dedicated magnet screwdriver

Unit : mm


Part Number	L	B	Mass (g)
SRD-6.35	210	6.35	98

SRD



Part number specification

SRSAS-M5-16



1 Individual Sales → P. xxxxx	Cleanroom Wash & Packaging → P. xxxxx	Screw Length Adjustment → P. xxxxx	Vibration Resistant → P. xxxxx	Modification process for captive use → P. xxxxx
Available / Add'l charge	Available / Add'l charge	Available / Add'l charge	Available / Add'l charge	Available / Add'l charge