


SVFCS Hex Socket Countersunk Head Screws with Ventilation Hole



Vacuum Protrusion Cleanroom wash & packaging SUS Stainless steel

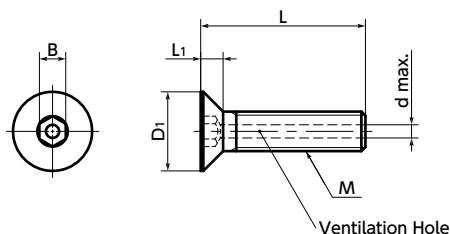

● Application

Vacuum devices, vacuum chambers, FPD production equipment, semiconductor devices, and electron microscopes

● Material/Finish



	SVFCS
Main Body	SUSXM7 (Equivalent to SUS304)

- The ventilation hole easily releases gas trapped in the screw holes of equipment and machines, and supports vacuum drawing of vacuum devices.
- The flat head does not protrude after tightening.
- Cleanroom wash and cleanroom packing are completed. ➔ P.xxxx


Unit : mm

Part Number 1	M (Coarse)		L 2										D1	L1	B	d	Mass (g)	Qty per pack
	Nominal of Thread	Pitch	5	6	8	10	12	16	20	25	30							
SVFCS-M3	M3	0.5											6	1.7	2	1.2	0.49 - 0.77	20
SVFCS-M4	M4	0.7											8	2.3	2.5	1.5	1 - 1.8	20
SVFCS-M5	M5	0.8											10	2.8	3	1.5	2.2 - 3.6	10
SVFCS-M6	M6	1											12	3.3	4	2	3.9 - 6.5	10
SVFCS-M8	M8	1.25											16	4.4	5	2	8.9 - 15	10

● When purchasing less volume than one full bag, a separate handling fee is charged. For details, see the Sold Separately Service.

● Usage example

Effective with vacuum devices and vacuum chambers that require the exhaustion of gas trapped in screw holes.

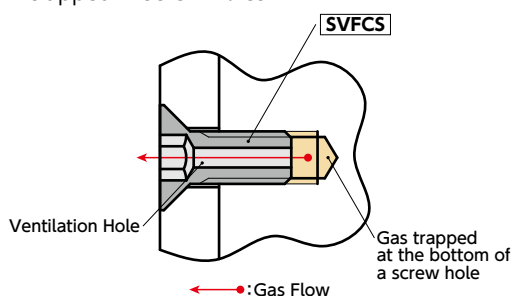

● Part number specification

SVFCS-M5-20

1

2

1 Individual Sales ➔ P.xxxx	Cleanroom Wash & Packaging ➔ P.xxxx	Screw Length Adjustment ➔ P.xxxx	Vibration Resistant ➔ P.xxxx	Modification process for captive use ➔ P.xxxx
Available / Add'l charge	Cleanroom washed and packed	Available / Add'l charge	Not Available	Not Available