


SADS-SD 螺丝接头 - 螺纹直径变更型

SUS 不锈钢

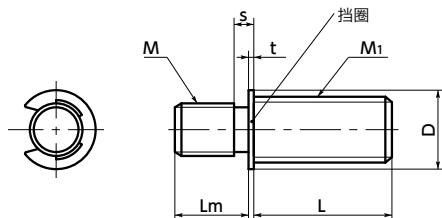

● 材质、表面处理

RoHS

	SADS-SD
螺纹部	SUS303
挡圈	相当于SUS304

- 通过与手柄及旋钮等内螺纹产品组合，可用作标准品中没有的特殊螺纹直径的手柄或旋钮。
- 请使用柱销或厌氧性粘接剂来固定螺纹。
- 与手柄及旋钮组合后反复紧固时，建议使用柱销。
- 利用挡圈正确地确定螺纹长度。

尺寸

单位 : mm

型号	M(粗牙)		M1(粗牙)		Lm	s	t	D	质量(g)
	螺纹公称直径 ①	螺距	螺纹公称直径 ②	螺距					
SADS-M4-M5-SD	M4	0.7	M5	0.8	4.5	1.4	0.6	7	1.9 - 6.7
SADS-M5-M4-SD	M5	0.8	M4	0.7	4.5	1.6	0.6	7	1.5 - 3.1
SADS-M5-M6-SD	M5	0.8	M6	1	4.5	1.6	0.6	9	2.7 - 12
SADS-M6-M5-SD	M6	1	M5	0.8	5.5	1.6	0.6	9	2.5 - 7.3
SADS-M6-M8-SD	M6	1	M8	1.25	5.5	2	0.6	9	4.9 - 27
SADS-M8-M6-SD	M8	1.25	M6	1	6.5	2	0.6	9	4.3 - 13
SADS-M8-M10-SD	M8	1.25	M10	1.5	6.5	2.5	0.8	12	10 - 43
SADS-M10-M8-SD	M10	1.5	M8	1.25	8.5	2.5	0.8	12	8.2 - 30
SADS-M10-M12-SD	M10	1.5	M12	1.75	8.5	3	0.8	16	16 - 64

SADS-SD 不锈钢制

型号	L(mm) ③									
	12	16	20	25	32	40	50	63	80	
SADS-M4-M5-SD	●	●	●	●	●	●	●			
SADS-M5-M4-SD	●	●	●	●	●					
SADS-M5-M6-SD	●	●	●	●	●	●	●	●		
SADS-M6-M5-SD	●	●	●	●	●	●	●	●		
SADS-M6-M8-SD	●	●	●	●	●	●	●	●	●	
SADS-M8-M6-SD	●	●	●	●	●	●	●	●		
SADS-M8-M10-SD		●	●	●	●	●	●	●	●	
SADS-M10-M8-SD	●	●	●	●	●	●	●	●	●	
SADS-M10-M12-SD		●	●	●	●	●	●	●	●	

● 型号指定

SADS-M10-M12-80-SD

产品符号 ① ② ③ 螺纹直径变更型

无尘洗净・无尘包装 ➔ P. xxxx

欢迎洽询

螺纹组合 ➔ P. xxxx

可对应，费用另计

螺纹切割 ➔ P. xxxx

可对应，费用另计

防松动 ➔ P. xxxx

可对应，费用另计