



PHK 导轨库浪霸用辅助垫片

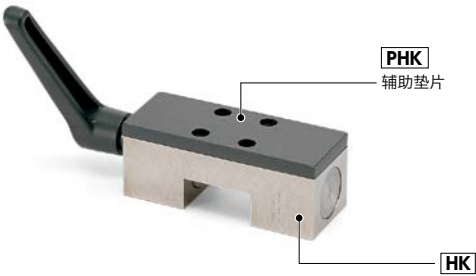

● 型号指定

PHK-25-4

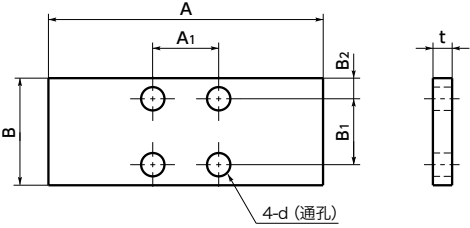

- 用于使 **MK** **MKS** **HK** 的高度与线轨滑座的高度一致的辅助垫片。
- 根据 **MK** **MKS** **HK** 与线性导轨的组合, 有时需要使用辅助垫片。请确认选型表。

● 材质、表面处理



	PHK
辅助垫片	相当于SS330 黑色氧化膜处理

尺寸

单位: mm

型号	A	A1	B	B1	B2	t	d (通孔) 适用螺纹尺寸	质量 (kg)
PHK-15-2	47	17	24	17	3.5	2	M4	0.02
PHK-15-3	47	17	24	17	3.5	3	M4	0.03
PHK-15-4	47	17	24	17	3.5	4	M4	0.04
PHK-15-6	47	17	24	17	3.5	6	M4	0.06
PHK-20-1	60	15	24	15	4.5	1	M5	0.02
PHK-20-2	60	15	24	15	4.5	2	M5	0.03
PHK-20-4	60	15	24	15	4.5	4	M5	0.05
PHK-25-2	70	20	30	20	5	2	M6	0.04
PHK-25-4	70	20	30	20	5	4	M6	0.07
PHK-25-6	70	20	30	20	5	6	M6	0.1
PHK-25-8	70	20	30	20	5	8	M6	0.13
PHK-30-2	90	22	39	22	8.5	2	M6	0.05
PHK-30-3	90	22	39	22	8.5	3	M6	0.08
PHK-30-4	90	22	39	22	8.5	4	M6	0.11
PHK-30-5	90	22	39	22	8.5	5	M6	0.13
PHK-45-2	120	26	44	26	9	2	M10	0.08
PHK-45-6	120	26	44	26	9	6	M10	0.24
PHK-45-8	120	26	44	26	9	8	M10	0.31
PHK-45-10	120	26	44	26	9	10	M10	0.39
PHK-45-12	120	26	44	26	9	12	M10	0.47
PHK-45-18	120	26	44	26	9	18	M10	0.24
PHK-55-4	140	30	49	30	9.5	4	M14	0.2
PHK-55-7	140	30	49	30	9.5	7	M14	0.39
PHK-55-10	140	30	49	30	9.5	10	M14	0.49
PHK-55-14	140	30	49	30	9.5	14	M14	0.49
PHK-55-17	140	30	49	30	9.5	17	M14	0.39
PHK-65-10	160	35	64	35	14.5	10	M16	0.78

手柄位置变更 → P.xxxx

不可对应