


- 用于使 **MK** **MKS** **HK** 的高度与线轨滑座的高度一致的辅助垫片。
- 根据 **MK** **MKS** **HK** 与线性导轨的组合, 有时需要使用辅助垫片。请确认选型表。

材质、表面处理	RoHS
主体	PMK 相当于 SS330 黑色氧化膜处理

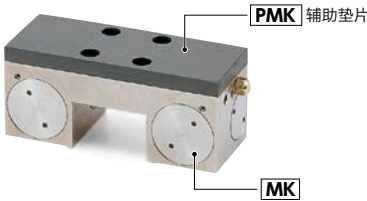

尺寸

型号 	A	A ₁	B ₁	B ₂	B ₃	t	d (通孔) 适用螺纹尺寸	质量 (kg)
PMK-15-4	55	15	39	15	15.5	4	M4	0.07
PMK-20-2-A	66	20	30	20	5	2	M6	0.03
PMK-20-4-A	66	20	30	20	5	4	M6	0.06
PMK-25-2	75	20	35	20	5	2	M6	0.04
PMK-25-4	75	20	35	20	5	4	M6	0.08
PMK-25-5	75	20	35	20	5	5	M6	0.1
PMK-25-6	75	20	35	20	5	6	M6	0.12
PMK-25-8	75	20	35	20	5	8	M6	0.16
PMK-25-9	75	20	35	20	5	9	M6	0.18
PMK-30-2	90	22	39	22	8.5	2	M8	0.06
PMK-30-3	90	22	39	22	8.5	3	M8	0.08
PMK-30-5	90	22	39	22	8.5	5	M8	0.13
PMK-30-6	90	22	39	22	8.5	6	M8	0.16
PMK-35-1	100	24	39	24	7.5	1	M8	0.03
PMK-35-3	100	24	39	24	7.5	3	M8	0.09
PMK-35-4	100	24	39	24	7.5	4	M8	0.12
PMK-35-7	100	24	39	24	7.5	7	M8	0.21
PMK-35-8	100	24	39	24	7.5	8	M8	0.24
PMK-35-10	100	24	39	24	7.5	10	M8	0.29
PMK-35-11	100	24	39	24	7.5	11	M8	0.32
PMK-35-14	100	24	39	24	7.5	14	M8	0.41
PMK-35-15	100	24	39	24	7.5	15	M8	0.44

单位 : mm

型号 	A	A ₁	B ₁	B ₂	B ₃	t	d (通孔) 适用螺纹尺寸	质量 (kg)
PMK-45-2	120	26	49	26	11.5	2	M10	0.09
PMK-45-6	120	26	49	26	11.5	6	M10	0.27
PMK-45-8	120	26	49	26	11.5	8	M10	0.35
PMK-45-10	120	26	49	26	11.5	10	M10	0.44
PMK-45-12	120	26	49	26	11.5	12	M10	0.53
PMK-45-16	120	26	49	26	11.5	16	M10	0.46
PMK-45-18	120	26	49	26	11.5	18	M10	0.79
PMK-55-3	128	30	49	30	9.5	3	M10	0.14
PMK-55-6	128	30	49	30	9.5	6	M10	0.28
PMK-55-7	128	30	49	30	9.5	7	M10	0.33
PMK-55-10	128	30	49	30	9.5	10	M10	0.47
PMK-55-13	128	30	49	30	9.5	13	M10	0.01
PMK-55-16	128	30	49	30	9.5	16	M10	0.75
PMK-55-17	128	30	49	30	9.5	17	M10	0.8
PMK-65-7	138	30	49	30	9.5	7	M10	0.35
PMK-65-10	138	30	49	30	9.5	10	M10	0.51
PMK-65-17	138	30	49	30	9.5	17	M10	0.82

单位 : mm

- 型号指定

PMK-35-7



 手柄位置变更 ➡ P.xxxx

不可对应