




● 材质、表面处理

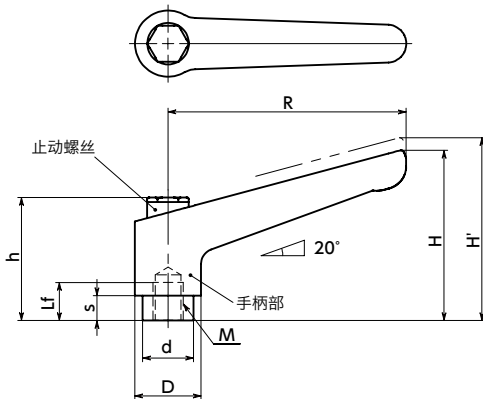

	LDFS-AS-HP
手柄部	SCS13 (相当于SUS304) 研磨
螺纹部	SUS303
止动螺丝	不锈钢
弹簧	不锈钢丝

- 全不锈钢制夹紧手柄。
- 具有优良的耐腐蚀性和强度。
- 止动螺丝上没有凹孔，脏物和灰尘不易堆积。容易清洁，适合于要求进行卫生管理的食品机械、药品机械等用途。
- 手柄部经过研磨表面处理。
- M3-M12的丰富螺纹尺寸。

单位: mm

型号 	M (粗牙)		Lf min.	R	H	H'	h	s	D	d	齿数	最大载荷*1 (N)	最大紧固力*1 (kN)	质量 (g)
	螺纹公称直径	螺距												
LDFS-3-AS-HP	M3	0.5	7	45	34	37.5	24.5	4	13	10	18	13	1.4	40
LDFS-4-AS-HP	M4	0.7	8	45	34	37.5	24.5	4	13	10	18	29	2.4	39
LDFS-5-AS-HP	M5	0.8	8	45	34	37.5	24.5	4	13	10	18	60	3.9	39
LDFS-6-AS-HP	M6	1	8	45	34	37.5	24.5	4	13	10	18	100	5.5	38
LDFS-6B-AS-HP	M6	1	11	63	45	49	31	6.5	17.5	13.5	24	72	5.5	88
LDFS-8-AS-HP	M8	1.25	11	63	45	49	31	6.5	17.5	13.5	24	180	10	86
LDFS-8B-AS-HP	M8	1.25	14	78	54	58	36	8	21	16	26	140	10	142
LDFS-10-AS-HP	M10	1.5	14	78	54	58	36	8	21	16	26	290	16	138
LDFS-10B-AS-HP	M10	1.5	17	92	64	68	43	11	24	19	28	240	16	223
LDFS-12A-AS-HP	M12	1.75	14	78	54	58	36	8	21	16	26	500	23	140
LDFS-12-AS-HP	M12	1.75	17	92	64	68	43	11	24	19	28	420	23	220

*1: 最大载荷、最大紧固力的定义请参照“关于夹紧手柄、张紧手柄的使用方法”。→ P.xxxx

● 型号指定

LDFS-10-AS-HP

 无尘洗净・无尘包装 → P.xxxx	 螺纹组合 → P.xxxx	 螺纹切割 → P.xxxx	 防松动 → P.xxxx	 激光刻印 → P.xxxx
欢迎洽询	可对应, 费用另计	不可对应	不可对应	可对应, 费用另计