


LDMS-AS 夹紧手柄(外螺纹) - 全不锈钢制

SUS 不锈钢

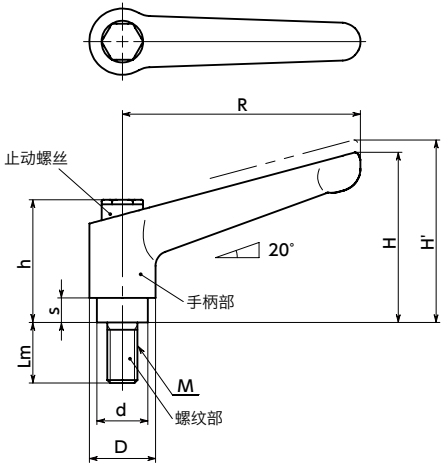

- 全不锈钢制夹紧手柄。
- 具有优良的耐腐蚀性和强度。
- 止动螺丝上没有凹孔, 脏物和灰尘不易堆积。适合于要求进行卫生管理的食品机械、药品机械等用途。
- M3-M12的丰富螺纹尺寸。

材质、表面处理	LDMS-AS
手柄部	SCS13 (相当于SUS304) 喷丸
螺纹部	SUS303
止动螺丝	不锈钢
弹簧	不锈钢丝



尺寸

单位 : mm

型号	M (粗牙)	螺纹公称直径	螺距	R	H	H'	h	s	D	d	齿数	最大载荷*1 (N)	最大紧固力*1 (kN)	质量 (g)
LDMS-3-AS	M3	0.5	45	34	37.5	24.5	4	13	10	18	13	1.4		40 - 41
LDMS-4-AS	M4	0.7	45	34	37.5	24.5	4	13	10	18	29	2.4		41 - 42
LDMS-5-AS	M5	0.8	45	34	37.5	24.5	4	13	10	18	60	3.9		42 - 46
LDMS-6-AS	M6	1	45	34	37.5	24.5	4	13	10	18	100	5.5		42 - 48
LDMS-6B-AS	M6	1	63	45	49	31	6.5	17.5	13.5	24	72	5.5		92 - 100
LDMS-8-AS	M8	1.25	63	45	49	31	6.5	17.5	13.5	24	180	10		95 - 109
LDMS-8B-AS	M8	1.25	78	54	58	36	8	21	16	26	140	10		152 - 172
LDMS-10-AS	M10	1.5	78	54	58	36	8	21	16	26	290	16		156 - 186
LDMS-10B-AS	M10	1.5	92	64	68	43	11	24	19	28	240	16		240 - 270
LDMS-12A-AS	M12	1.75	78	54	58	36	8	21	16	26	500	23		165 - 207
LDMS-12-AS	M12	1.75	92	64	68	43	11	24	19	28	420	23		250 - 291

*1 : 最大载荷、最大紧固力的定义请参照“关于夹紧手柄、张紧手柄的使用方法”。➡ P.xxxx

型号	Lm (mm)											
	6	8	10	12	16	20	25	32	40	50	63	80
LDMS-3-AS	●	●	●	●	●							
LDMS-4-AS			●	●	●	●	●	●				
LDMS-5-AS				●	●	●	●	●	●	●		
LDMS-6-AS				●	●	●	●	●	●	●		
LDMS-6B-AS					●	●	●	●	●	●	●	
LDMS-8-AS					●	●	●	●	●	●	●	
LDMS-8B-AS						●	●	●	●	●	●	●
LDMS-10-AS						●	●	●	●	●	●	●
LDMS-10B-AS						●	●	●	●	●	●	●
LDMS-12A-AS						●	●	●	●	●	●	●
LDMS-12-AS						●	●	●	●	●	●	●

● 相关产品

备有适合利用长孔进行滑动机构的定位、固定的垫圈 **SWAS-PPK**。
➡ P.xxxx



● 型号指定

LDMS-3-6-AS



2 螺纹长度 Lm 请从表中标有 ● 的尺寸中选择。

无尘洗净・无尘包装 ➡ P.xxxx	螺纹组合 ➡ P.xxxx	螺纹切割 ➡ P.xxxx	防松动 ➡ P.xxxx	激光刻印 ➡ P.xxxx
欢迎洽询	不可对应	可对应, 费用另计	不可对应	可对应, 费用另计



☎ 0512-5290-1560

✉ info@nbk1560-chn.com.cn

🌐 https://www.nbk1560-chn.com.cn/



☎ 0512-5290-1560

✉ info@nbk1560-chn.com.cn

🌐 https://www.nbk1560-chn.com.cn/