


LDMS-NI-HP 夹紧手柄(外螺纹) - 全不锈钢制

SUS 不锈钢

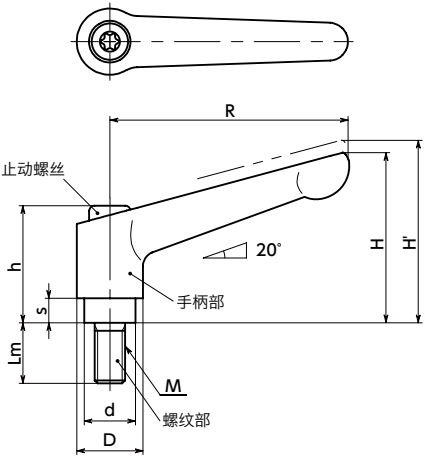

- 全不锈钢制夹紧手柄。
- 具有优良的耐腐蚀性和强度。
- 手柄部经过研磨表面处理。
- M3-M12的丰富螺纹尺寸。

- 材质、表面处理



	LDMS-NI-HP
手柄部	SCS13 (相当于SUS304) 研磨
螺纹部	SUS303
止动螺丝	不锈钢
弹簧	不锈钢丝



尺寸

单位：mm

型号	M(粗牙)		R	H	H'	h	s	D	d	齿数	最大载荷*1 (N)	最大紧固力*1 (kN)	质量(g)
	螺纹公称直径	螺距											
LDMS-3-NI-HP	M3	0.5	45	34	37.5	24.5	4	13	10	18	13	1.4	40 - 41
LDMS-4-NI-HP	M4	0.7	45	34	37.5	24.5	4	13	10	18	29	2.4	41 - 42
LDMS-5-NI-HP	M5	0.8	45	34	37.5	24.5	4	13	10	18	60	3.9	42 - 46
LDMS-6-NI-HP	M6	1	45	34	37.5	24.5	4	13	10	18	100	5.5	42 - 48
LDMS-6B-NI-HP	M6	1	63	45	49	31	6.5	17.5	13.5	24	72	5.5	92 - 100
LDMS-8-NI-HP	M8	1.25	63	45	49	31	6.5	17.5	13.5	24	180	10	95 - 109
LDMS-8B-NI-HP	M8	1.25	78	54	58	36	8	21	16	26	140	10	152 - 172
LDMS-10-NI-HP	M10	1.5	78	54	58	36	8	21	16	26	290	16	156 - 186
LDMS-10B-NI-HP	M10	1.5	92	64	68	43	11	24	19	28	240	16	240 - 270
LDMS-12A-NI-HP	M12	1.75	78	54	58	36	8	21	16	26	500	23	165 - 207
LDMS-12-NI-HP	M12	1.75	92	64	68	43	11	24	19	28	420	23	250 - 291

*1：最大载荷、最大紧固力的定义请参照“关于夹紧手柄、张紧手柄的使用方法”。→ P.xxxx

型号	Lm (mm)											
	6	8	10	12	16	20	25	32	40	50	63	80
LDMS-3-NI-HP	●	●	●	●	●							
LDMS-4-NI-HP			●	●	●	●	●	●				
LDMS-5-NI-HP				●	●	●	●	●	●	●		
LDMS-6-NI-HP				●	●	●	●	●	●	●		
LDMS-6B-NI-HP					●	●	●	●	●	●	●	
LDMS-8-NI-HP					●	●	●	●	●	●	●	
LDMS-8B-NI-HP						●	●	●	●	●	●	●
LDMS-10-NI-HP						●	●	●	●	●	●	●
LDMS-10B-NI-HP						●	●	●	●	●	●	●
LDMS-12A-NI-HP						●	●	●	●	●	●	●
LDMS-12-NI-HP						●	●	●	●	●	●	●

- 型号指定

LDMS-3-16-NI-HP

1 2 1

2 螺纹长度Lm请从表中标有●的尺寸中选择。

无尘洗净・无尘包装 → P.xxxx	螺纹组合 → P.xxxx	螺纹切割 → P.xxxx	防松动 → P.xxxx	激光刻印 → P.xxxx
欢迎洽询	不可对应	可对应, 费用另计	不可对应	可对应, 费用另计