


LEMS-MD 塑料夹紧手柄(外螺纹) - 支持金属检测

SUS 不锈钢



● 材质、表面处理

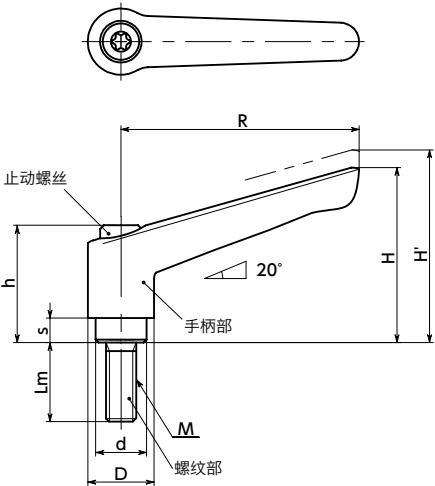

	LEMS-MD
手柄部	尼龙6・铁类成分 (蓝灰)
螺纹部	SUS303
止动螺丝	不锈钢
锯齿环(插件)	锌压铸件
弹簧	不锈钢丝

尺寸

单位：mm

型号	M(粗牙)		R	H	H'	h	s	D	d	齿数	最大载荷*1 (N)	最大紧固力*1 (kN)	质量(g)
	螺纹公称直径	螺距											
LEMS-3-MD	M3	0.5	45	35.5	39	24.5	4.2	13	10	18	9	0.95	15
LEMS-4-MD	M4	0.7	45	35.5	39	24.5	4.2	13	10	18	21	1.7	16 - 17
LEMS-5-MD	M5	0.8	45	35.5	39	24.5	4.2	13	10	18	42	2.7	17 - 21
LEMS-6-MD	M6	1	45	35.5	39	24.5	4.2	13	10	18	70	3.8	17 - 23
LEMS-6B-MD	M6	1	63	45.8	49.8	31	6.5	17.5	13.5	24	50	3.8	38 - 46
LEMS-8-MD	M8	1.25	63	45.8	49.8	31	6.5	17.5	13.5	24	120	7	41 - 55
LEMS-8B-MD	M8	1.25	78	54.6	58.6	36	8	21	16	26	100	7	65 - 85
LEMS-10-MD	M10	1.5	78	54.6	58.6	36	8	21	16	26	200	11	69 - 99
LEMS-10B-MD	M10	1.5	92	65.7	69.7	43	11	25	19	28	170	11	82 - 112
LEMS-12A-MD	M12	1.75	78	54.6	58.6	36	8	21	16	26	350	16	74 - 116
LEMS-12-MD	M12	1.75	92	65.7	69.7	43	11	25	19	28	290	16	112 - 153

*1：最大载荷、最大紧固力的定义请参照“关于夹紧手柄、张紧手柄的使用方法”。→ P.xxxx

● 型号指定

LEMS-6B-16-MD

1 2 1

2 螺纹长度Lm请从表中标有●的尺寸中选择。

无尘洗净・无尘包装 → P.xxxx	螺纹组合 → P.xxxx	螺纹切割 → P.xxxx	防松动 → P.xxxx	激光刻印 → P.xxxx
欢迎洽询	不可对应	可对应, 费用另计	不可对应	可对应, 费用另计



型号	Lm (mm)											
	6	8	10	12	16	20	25	32	40	50	63	80
LEMS-3-MD	●	●	●	●	●							
LEMS-4-MD			●	●	●	●	●	●				
LEMS-5-MD				●	●	●	●	●	●	●		
LEMS-6-MD				●	●	●	●	●	●	●		
LEMS-6B-MD					●	●	●	●	●	●	●	
LEMS-8-MD					●	●	●	●	●	●	●	
LEMS-8B-MD						●	●	●	●	●	●	●
LEMS-10-MD						●	●	●	●	●	●	●
LEMS-10B-MD						●	●	●	●	●	●	●
LEMS-12A-MD						●	●	●	●	●	●	●
LEMS-12-MD						●	●	●	●	●	●	●