




*1：开槽加工前的尺寸容许偏差。

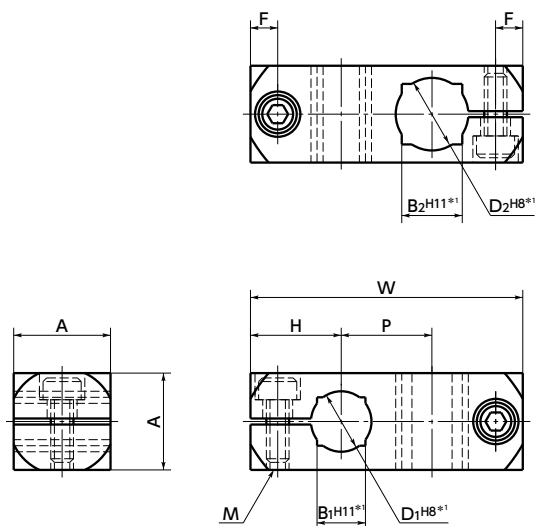

- 交叉连接2根轴的夹紧器。
- 夹紧型。便于轴的安装、拆卸。不会损伤轴。
- 便于传送线的侧面导向及传感器的调整。
- 轻量铝制和耐腐蚀性优良的不锈钢制已实现标准化。
- 圆轴和方轴均可适用。
- 所有产品均附带内六角螺栓。

● 材质、表面处理

RoHS

	FCCA-C 铝制	FCCS-C 不锈钢制
主体	铝合金	SUS304
内六角螺栓	SUSXM7	SUSXM7 二硫化钼涂层

单位：mm

型号 	质量 (g)	型号 	质量 (g)	D ₁	D ₂	B ₁	B ₂	A	W	P	H	F	M (粗牙)
FCCA-8-8-C	9	FCCS-8-8-C	26	8	8			12	32	10	11	4	M3
FCCA-8-10-C	16	FCCS-8-10-C	46	8	10		8	14	40	12	14	4.5	M4
FCCA-10-10-C	15	FCCS-10-10-C	43	10	10	8	8	14	40	12	14	4.5	M4
FCCA-10-12-C	22	FCCS-10-12-C	65	10	12	8	10	16	45	15	15	4.5	M4
FCCA-12-12-C	21	FCCS-12-12-C	61	12	12	10	10	16	45	15	15	4.5	M4
FCCA-10-15-C	39	FCCS-10-15-C	116	10	15	8	12	19	55	19	18	5.5	M5
FCCA-12-15-C	38	FCCS-12-15-C	111	12	15	10	12	19	55	19	18	5.5	M5
FCCA-15-15-C	34	FCCS-15-15-C	102	15	15	12	12	19	55	19	18	5.5	M5
FCCA-12-20-C	77	FCCS-12-20-C	229	12	20	10	16	25	64	24	20	5.5	M5
FCCA-15-20-C	73	FCCS-15-20-C	217	15	20	12	16	25	64	24	20	5.5	M5
FCCA-20-20-C	64	FCCS-20-20-C	190	20	20	16	16	25	64	24	20	5.5	M5

- 轴的推荐尺寸容许偏差为g6。请使用加长型扳手紧固螺丝。

● 使用例



● 型号指定

FCCS-10-15-C



 无尘洗净・无尘包装 → P.xxxx

欢迎洽询

 螺纹切割 → P.xxxx

不可对应

 防松动 → P.xxxx

欢迎洽询

 激光刻印 → P.xxxx

可对应, 费用另计