



PLXS-A

PLXS-A-RD

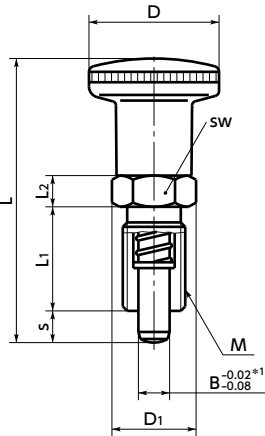

PLXS-AK

PLXS-AK-RD



* 1 : 变更了销的公差。

● 材质、表面处理

	PLXS-A	PLXS-AK	PLXS-A-RD	PLXS-AK-RD
旋钮	尼龙6(亚光黑)	尼龙6(亚光黑)	尼龙6(亚光红)	尼龙6(亚光红)
主体	SUS303	SUS303	SUS303	SUS303
销	SUS303 镀镍	SUS303 镀镍	SUS303 镀镍	SUS303 镀镍
弹簧	SUS301	SUS301	SUS301	SUS301
锁定螺母	—	SUS303	—	SUS303



PLXS-A 无锁定螺母 PLXS-AK 带锁定螺母

单位：mm

型号	B	s	M(细牙)		D	D ₁	L	L ₁	L ₂	L _b	sw	sw ₁	载荷(N) min./max.	销的 剪切载荷(N)	适用轴环 PXCS	质量(g)
			螺纹公称直径	螺距												
PLXS-4-4-A	4	4	M8	1	16	11.5	39	16	5	—	10	—	4.5 / 12	1160	PXCS-8-10-*	11
PLXS-4-6-A	4	6	M8	1	16	11.5	41	16	5	—	10	—	4 / 12.5	1160	PXCS-8-10-*	11
PLXS-5-5-A	5	5	M10	1	19	13.8	45	18	6	—	12	—	5 / 15	1820	PXCS-10-12-*	20
PLXS-5-8-A	5	8	M10	1	19	13.8	48	18	6	—	12	—	5 / 18	1820	PXCS-10-12-*	20
PLXS-6-6-A	6	6	M12	1.5	23	16.2	54	22	6	—	14	—	6.5 / 19	2620	PXCS-12-14-*	32
PLXS-6-9-A	6	9	M12	1.5	23	16.2	57	22	6	—	14	—	6 / 25	2620	PXCS-12-14-*	33
PLXS-8-8-A	8	8	M16	1.5	28	19.6	66	26	8	—	17	—	8.5 / 26	4660	PXCS-16-17-*	67
PLXS-8-12-A	8	12	M16	1.5	28	19.6	70	26	8	—	17	—	8.5 / 28	4660	PXCS-16-17-*	68
PLXS-10-12-A	10	12	M16	1.5	28	19.6	70	26	8	—	17	—	9.5 / 38	7280	PXCS-16-17-*	69
PLXS-12-15-A	12	15	M20	1.5	33	25.4	86.5	33	10	—	22	—	11.5 / 40	10400	PXCS-20-22-*	130
PLXS-16-20-A	16	20	M24	2	33	31.2	98.5	38	12	—	27	—	13 / 54	18600	—	207
PLXS-4-4-AK	4	4	M8	1	16	11.5	39	16	5	4	10	13	4.5 / 12	1160	PXCS-8-10-*	16
PLXS-4-6-AK	4	6	M8	1	16	11.5	41	16	5	4	10	13	4 / 12.5	1160	PXCS-8-10-*	16
PLXS-5-5-AK	5	5	M10	1	19	13.8	45	18	6	5	12	17	5 / 15	1820	PXCS-10-12-*	27
PLXS-5-8-AK	5	8	M10	1	19	13.8	48	18	6	5	12	17	5 / 18	1820	PXCS-10-12-*	27
PLXS-6-6-AK	6	6	M12	1.5	23	16.2	54	22	6	6	14	18	6.5 / 19	2620	PXCS-12-14-*	42
PLXS-6-9-AK	6	9	M12	1.5	23	16.2	57	22	6	6	14	18	6 / 25	2620	PXCS-12-14-*	43
PLXS-8-8-AK	8	8	M16	1.5	28	19.6	66	26	8	8	17	24	8.5 / 26	4660	PXCS-16-17-*	87
PLXS-8-12-AK	8	12	M16	1.5	28	19.6	70	26	8	8	17	24	8.5 / 28	4660	PXCS-16-17-*	88
PLXS-10-12-AK	10	12	M16	1.5	28	19.6	70	26	8	8	17	24	9.5 / 38	7280	PXCS-16-17-*	89
PLXS-12-15-AK	12	15	M20	1.5	33	25.4	86.5	33	10	10	22	30	11.5 / 40	10400	PXCS-20-22-*	165
PLXS-16-20-AK	16	20	M24	2	33	31.2	98.5	38	12	12	27	36	13 / 54	18600	—	262

无尘洗净・无尘包装 ➡ P.xxxx

防松动 ➡ P.xxxx

激光刻印 ➡ P.xxxx

欢迎洽询

可对应, 费用另计

可对应, 费用另计

● 相关产品

主体螺丝长于安装部时, 在调整旋入长度时请使用分度柱塞用轴环

PXCS。

➡ P.xxxx



● 型号指定

PLXS-8-12-AK-RD



PLXS-A-RD 无锁定螺母 PLXS-AK-RD 带锁定螺母

单位：mm

型号	B	s	M(细牙)		D	D ₁	L	L ₁	L ₂	L _b	sw	sw ₁	载荷(N) min./max.	销的 剪切载荷(N)	适用轴环 PXCS	质量(g)
			螺纹公称直径	螺距												
PLXS-4-4-A-RD	4	4	M8	1	16	11.5	39	16	5	—	10	—	4.5 / 12	1160	PXCS-8-10-*	11
PLXS-4-6-A-RD	4	6	M8	1	16	11.5	41	16	5	—	10	—	4 / 12.5	1160	PXCS-8-10-*	11
PLXS-5-5-A-RD	5	5	M10	1	19	13.8	45	18	6	—	12	—	5 / 15	1820	PXCS-10-12-*	20
PLXS-5-8-A-RD	5	8	M10	1	19	13.8	48	18	6	—	12	—	5 / 18	1820	PXCS-10-12-*	20
PLXS-6-6-A-RD	6	6	M12	1.5	23	16.2	54	22	6	—	14	—	6.5 / 19	2620	PXCS-12-14-*	32
PLXS-6-9-A-RD	6	9	M12	1.5	23	16.2	57	22	6	—	14	—	6 / 25	2620	PXCS-12-14-*	33
PLXS-8-8-A-RD	8	8	M16	1.5	28	19.6	66	26	8	—	17	—	8.5 / 26	4660	PXCS-16-17-*	67
PLXS-8-12-A-RD	8	12	M16	1.5	28	19.6	70	26	8	—	17	—	8.5 / 28	4660	PXCS-16-17-*	68
PLXS-10-12-A-RD	10	12	M16	1.5	28	19.6	70	26	8	—	17	—	9.5 / 38	7280	PXCS-16-17-*	69
PLXS-12-15-A-RD	12	15	M20	1.5	33	25.4	86.5	33	10	—	22	—	11.5 / 40	10400	PXCS-20-22-*	130
PLXS-16-20-A-RD	16	20	M24	2	33	31.2	98.5	38	12	—	27	—	13 / 54	18600	—	207
PLXS-4-4-AK-RD	4	4	M8	1	16	11.5	39	16	5	4	10	13	4.5 / 12	1160	PXCS-8-10-*	16
PLXS-4-6-AK-RD	4	6	M8	1	16	11.5	41	16	5	4	10	13	4 / 12.5	1160	PXCS-8-10-*	16
PLXS-5-5-AK-RD	5	5	M10	1	19	13.8	45	18	6	5	12	17	5 / 15	1820	PXCS-10-12-*	27
PLXS-5-8-AK-RD	5	8	M10	1	19	13.8	48	18	6	5	12	17	5 / 18	1820	PXCS-10-12-*	27
PLXS-6-6-AK-RD	6	6	M12	1.5	23	16.2	54	22	6	6	14	18	6.5 / 19	2620	PXCS-12-14-*	42
PLXS-6-9-AK-RD	6	9	M12	1.5	23	16.2	57	22	6	6	14	18	6 / 25	2620	PXCS-12-14-*	43
PLXS-8-8-AK-RD	8	8	M16	1.5	28	19.6	66	26	8	8	17	24	8.5 / 26	4660	PXCS-16-17-*	87
PLXS-8-12-AK-RD	8	12	M16	1.5	28	19.6	70	26	8	8	17	24	8.5 / 28	4660	PXCS-16-17-*	88
PLXS-10-12-AK-RD	10	12	M16	1.5	28	19.6	70	26	8	8	17	24	9.5 / 38	7280	PXCS-16-17-*	89
PLXS-12-15-AK-RD	12	15	M20	1.5	33	25.4	86.5	33	10	10	22	30	11.5 / 40	10400	PXCS-20-22-*	165
PLXS-16-20-AK-RD	16	20	M24	2	33	31.2	98.5	38	12	12	27	36	13 / 54	18600	—	262