




- 采用相当于SUS316的全不锈钢制造，耐腐蚀性优良。
- 不使用工具就能简单夹紧并固定零件。
- 采用基于人体工学的易于抓握的设计。

● 材质、表面处理

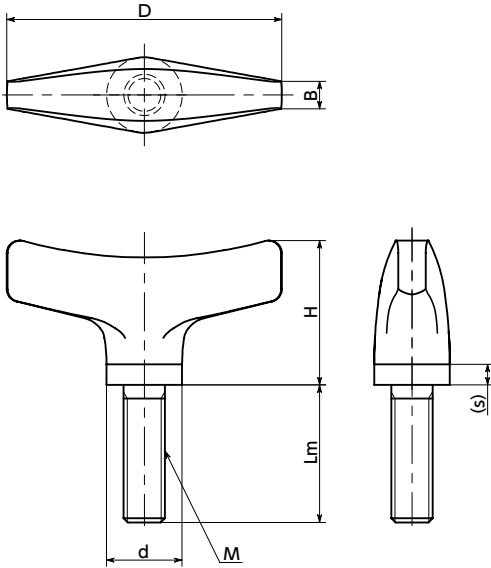

	KCWMS-A4
主体	相当于SUS316 喷丸

尺寸

单位：mm

型号 	D	M(粗牙)		H	s	B	d	质量(g)
		螺纹公称直径	螺距					
KCWMS-32-M5-A4	32	M5	0.8	18	3	4	9	18 - 19
KCWMS-32-M6-A4	32	M6	1	18	3	4	9	19 - 22
KCWMS-40-M6-A4	40	M6	1	21	3	4	11	32 - 35
KCWMS-40-M8-A4	40	M8	1.25	21	3	4	11	36 - 41
KCWMS-50-M8-A4	50	M8	1.25	26	3	6	13	61 - 66
KCWMS-50-M10-A4	50	M10	1.5	26	3	6	13	67 - 79
KCWMS-63-M10-A4	63	M10	1.5	33	4	11	16	113 - 125
KCWMS-63-M12-A4	63	M12	1.75	33	4	11	16	123 - 145

型号	Lm(mm) 							
	10	12	16	20	25	30	40	50
KCWMS-32-M5-A4	●	●	●	●				
KCWMS-32-M6-A4		●	●	●	●			
KCWMS-40-M6-A4		●	●	●	●			
KCWMS-40-M8-A4			●	●	●	●		
KCWMS-50-M8-A4			●	●	●	●		
KCWMS-50-M10-A4				●	●	●	●	
KCWMS-63-M10-A4				●	●	●	●	
KCWMS-63-M12-A4					●	●	●	●

● 型号指定

KCWMS-32-M5-12-A4

 螺纹长度Lm请从表中标有●的尺寸中选择。 无尘洗净·无尘包装 → P.xxxx

欢迎咨询

 螺纹组合 → P.xxxx

不可对应

 螺纹切割 → P.xxxx

可对应，费用另计

 防松动 → P.xxxx

可对应，费用另计

 激光刻印 → P.xxxx

可对应，费用另计