




● 材质、表面处理

	FCMS-G
螺丝	SUS303
垫	玻璃纤维增强尼龙6 (亚光黑)
锁定螺母	SUS304
橡胶膜片	NBR(亚光黑) 肖氏硬度 A70

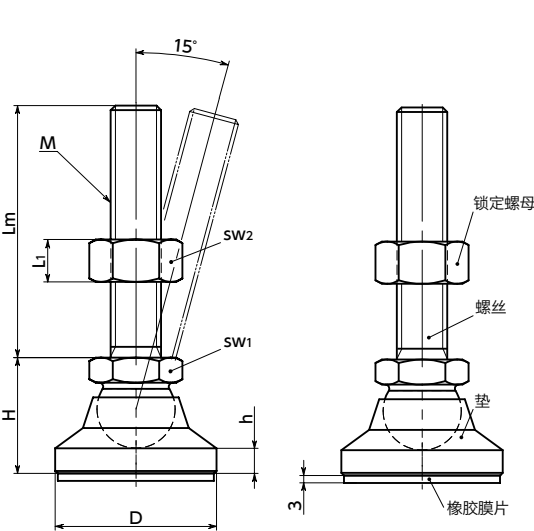

- 带塑料垫的调平调节器。
- 螺纹采用不锈钢制。耐腐蚀性优良。
- 带橡胶膜片。
- 垫最大可倾斜15°。适用于倾斜面。



尺寸

单位：mm

型号	D	M(粗牙)		H	h	sw1	sw2	L1	静态容许载荷*1 (N)	质量(g)
		螺纹公称直径	螺距							
FCMS-25-M6-G	25	M6	1	18.5	4	12	10	5.2	5000	27 - 31
FCMS-25-M8-G	25	M8	1.25	18.5	4	12	13	6.8	5000	36 - 44
FCMS-25-M10-G	25	M10	1.5	18.5	4	12	16	8.4	5000	51 - 61
FCMS-32-M8-G	32	M8	1.25	22.5	5	12	13	6.8	7000	39 - 48
FCMS-32-M10-G	32	M10	1.5	22.5	5	15	16	8.4	7000	68 - 84
FCMS-32-M12-G	32	M12	1.75	22.5	5	15	18	10.8	7000	91 - 114
FCMS-40-M8-G	40	M8	1.25	25.5	6	15	13	6.8	10000	56 - 70
FCMS-40-M10-G	40	M10	1.5	25.5	6	15	16	8.4	10000	76 - 87
FCMS-40-M12-G	40	M12	1.75	25.5	6	17	18	10.8	10000	110 - 140
FCMS-50-M8-G	50	M8	1.25	27.5	7	15	13	6.8	10000	70 - 85
FCMS-50-M10-G	50	M10	1.5	27.5	7	15	16	8.4	10000	86 - 100
FCMS-50-M12-G	50	M12	1.75	27.5	7	17	18	10.8	10000	122 - 148
FCMS-50-M16-G	50	M16	2	27.5	7	17	24	14.8	10000	178 - 230
FCMS-60-M10-G	60	M10	1.5	35.5	8.5	17	16	8.4	14000	98 - 120
FCMS-60-M12-G	60	M12	1.75	35.5	8.5	17	18	10.8	14000	137 - 165
FCMS-60-M16-G	60	M16	2	35.5	8.5	24	24	14.8	14000	262 - 316
FCMS-60-M20-G	60	M20	2.5	35.5	8.5	24	30	18	14000	386 - 505
FCMS-60-M24-G	60	M24	3	35.5	8.5	24	36	21.5	14000	523 - 695

*1：表中数值为螺丝垂直于垫的状态下的值。在螺丝带角度的状态下，会发生弯曲和屈曲应力，导致静态容许载荷变小。
表中数值非保证值，仅供参考。

型号	Lm(mm)								
	40	50	63	80	98	100	125	138	158
FCMS-25-M6-G	●	●	●						
FCMS-25-M8-G	●	●	●						
FCMS-25-M10-G		●	●	●					
FCMS-32-M8-G	●	●	●						
FCMS-32-M10-G		●	●	●					
FCMS-32-M12-G			●	●		●			
FCMS-40-M8-G		●	●	●					
FCMS-40-M10-G		●	●	●					
FCMS-40-M12-G			●	●		●			
FCMS-50-M8-G		●	●	●					
FCMS-50-M10-G		●	●	●					
FCMS-50-M12-G			●	●		●			
FCMS-50-M16-G			●	●		●			
FCMS-60-M10-G		●	●	●					
FCMS-60-M12-G			●	●		●			
FCMS-60-M16-G				●		●	●		
FCMS-60-M20-G					●			●	●
FCMS-60-M24-G					●			●	●

● 型号指定

FCMS-25-M8-40-G



2 螺纹长度Lm请从表中标有●的尺寸中选择。