




- 耐久性优良的金属制调平调节器。
- 附带与橡胶膜片采用一体式结构的地脚螺栓安装板。可用于在地面上固定。可有效防止因冲击和振动导致的设备、装置错位。
- 螺丝、垫为不锈钢制，耐腐蚀性优良。
- 垫最大可倾斜6°。适用于倾斜面。
- 材质、表面处理

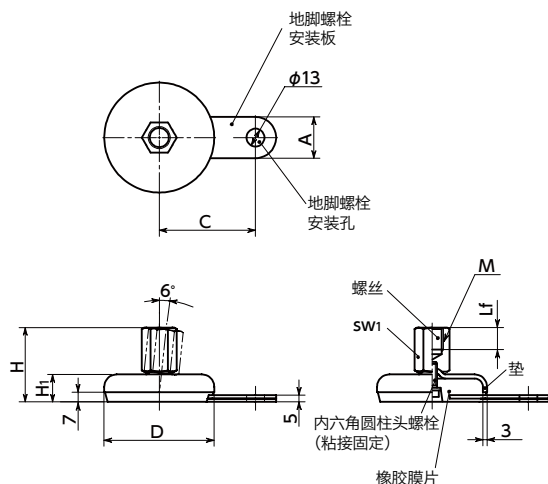

	FNAFS-X
螺丝	SUS303
垫	SUS304
地脚螺栓 安装板	SUS304
橡胶膜片	NBR(黑)肖氏硬度A80±5
内六角圆柱头螺栓	不锈钢

● 型号指定

FNAFS-80-M16-54-B1-X

单位: mm

型号 	D	M(粗牙)		Lf	H	H1	C	A	sw1	静态容许载荷*1 (N)	质量(g)
		螺纹公称直径	螺距								
FNAFS-50-M8-40-B1-X	50	M8	1.25	8	40	18	45	25	14	8000	130
FNAFS-50-M10-43-B1-X	50	M10	1.5	10	43	18	45	25	14	13000	131
FNAFS-50-M12-47-B1-X	50	M12	1.75	12	47	18	45	25	17	20000	159
FNAFS-50-M16-52-B1-X	50	M16	2	16	52	18	45	25	22	28000	223
FNAFS-60-M8-41-B1-X	60	M8	1.25	8	41	19	50	25	14	8000	170
FNAFS-60-M10-44-B1-X	60	M10	1.5	10	44	19	50	25	14	13000	171
FNAFS-60-M12-48-B1-X	60	M12	1.75	12	48	19	50	25	17	20000	202
FNAFS-60-M16-53-B1-X	60	M16	2	16	53	19	50	25	22	28000	265
FNAFS-80-M8-42-B1-X	80	M8	1.25	8	42	20	70	30	14	8000	300
FNAFS-80-M10-45-B1-X	80	M10	1.5	10	45	20	70	30	14	13000	301
FNAFS-80-M12-49-B1-X	80	M12	1.75	12	49	20	70	30	17	15000	321
FNAFS-80-M16-54-B1-X	80	M16	2	16	54	20	70	30	22	19000	364
FNAFS-80-M20-62-B1-X	80	M20	2.5	20	62	20	70	30	27	19000	440
FNAFS-100-M8-43-B1-X	100	M8	1.25	8	43	21	80	30	14	8000	440
FNAFS-100-M10-46-B1-X	100	M10	1.5	10	46	21	80	30	14	13000	441
FNAFS-100-M12-50-B1-X	100	M12	1.75	12	50	21	80	30	17	17000	461
FNAFS-100-M16-55-B1-X	100	M16	2	16	55	21	80	30	22	17000	504
FNAFS-100-M20-63-B1-X	100	M20	2.5	20	63	21	80	30	27	17000	580

*1: 静态容许载荷为无橡胶膜片的值。也是螺丝垂直于垫的状态下的值。在螺丝带角度的状态下，会发生弯曲和屈曲应力，导致静态容许载荷变小。
表中数值非保证值，仅供参考。

 无尘洗净・无尘包装 → P. xxxx	 螺纹切割 → P. xxxx	 防松动 → P. xxxx	 激光刻印 → P. xxxx
不可对应	不可对应	不可对应	欢迎洽询