


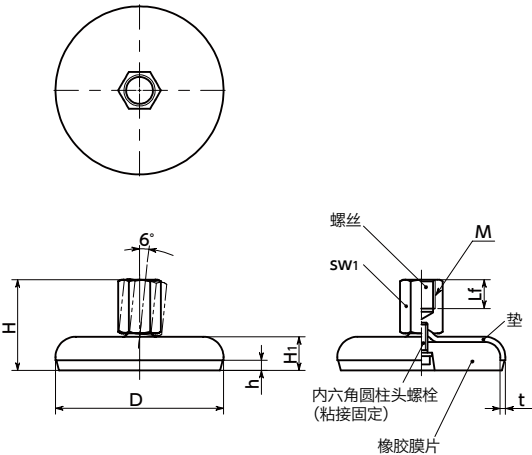

- 耐久性优良的金属制调平调节器。
- 螺丝、垫为不锈钢制，耐腐蚀性优良。
- 垫最大可倾斜6°。适用于倾斜面。
- 带橡胶膜片，可有效防止设备、装置的滑动。

TPE制的耐候性优良。

FNFS-B1-X 橡胶膜片：NBR制

FNFS-B2-X 橡胶膜片：TPE制

● 材质、表面处理			RoHS
	FNFS-B1-X	FNFS-B2-X	
螺丝	SUS303	SUS303	
垫	SUS304	SUS304	
橡胶膜片	NBR(黑)肖氏硬度A80±5	TPE(白)肖氏硬度A80±5	
内六角圆柱头螺栓	不锈钢	不锈钢	

FNFS-B1-X 橡胶膜片：NBR

型号	D	M(粗牙)		Lf	H	H1	h	t	sw1	静态容许载荷*1 (N)	质量(g)
		螺纹公称直径	螺距								
FNFS-50-M8-37-B1-X	50	M8	1.25	8	37	14.5	3.5	3	14	8000	110
FNFS-50-M10-40-B1-X	50	M10	1.5	10	40	14.5	3.5	3	14	13000	111
FNFS-50-M12-43-B1-X	50	M12	1.75	12	43	14.5	3.5	3	17	20000	139
FNFS-50-M16-49-B1-X	50	M16	2	16	49	14.5	3.5	3	22	28000	203
FNFS-60-M8-38-B1-X	60	M8	1.25	8	38	16	4	3	14	8000	150
FNFS-60-M10-41-B1-X	60	M10	1.5	10	41	16	4	3	14	13000	151
FNFS-60-M12-45-B1-X	60	M12	1.75	12	45	16	4	3	17	20000	182
FNFS-60-M16-50-B1-X	60	M16	2	16	50	16	4	3	22	28000	245
FNFS-80-M8-40-B1-X	80	M8	1.25	8	40	18	5	3	14	8000	250
FNFS-80-M10-43-B1-X	80	M10	1.5	10	43	18	5	3	14	13000	251
FNFS-80-M12-47-B1-X	80	M12	1.75	12	47	18	5	3	17	15000	271
FNFS-80-M16-52-B1-X	80	M16	2	16	52	18	5	3	22	19000	314
FNFS-80-M20-60-B1-X	80	M20	2.5	20	60	18	5	3	27	19000	390
FNFS-100-M8-42-B1-X	100	M8	1.25	8	42	20	6	3	14	8000	390
FNFS-100-M10-45-B1-X	100	M10	1.5	10	45	20	6	3	14	13000	391
FNFS-100-M12-49-B1-X	100	M12	1.75	12	49	20	6	3	17	17000	411
FNFS-100-M16-54-B1-X	100	M16	2	16	54	20	6	3	22	17000	454
FNFS-100-M20-62-B1-X	100	M20	2.5	20	62	20	6	3	27	17000	530
FNFS-120-M20-65-B1-X	120	M20	2.5	20	65	22	6	4	27	25000	800

*1：静态容许载荷为无橡胶膜片的值。也是螺丝垂直于垫的状态下的值。在螺丝带角度的状态下，会发生弯曲和屈曲应力，导致静态容许载荷变小。
表中数值非保证值，仅供参考。

FNFS-B2-X 橡胶膜片：TPE

型号	D	M(粗牙)		Lf	H	H1	h	t	sw1	静态容许载荷*1 (N)	质量(g)
		螺纹公称直径	螺距								
FNFS-50-M8-37-B2-X	50	M8	1.25	8	37	14.5	3.5	3	14	8000	110
FNFS-50-M10-40-B2-X	50	M10	1.5	10	40	14.5	3.5	3	14	13000	111
FNFS-50-M12-43-B2-X	50	M12	1.75	12	43	14.5	3.5	3	17	20000	139
FNFS-50-M16-49-B2-X	50	M16	2	16	49	14.5	3.5	3	22	25000	203
FNFS-60-M8-38-B2-X	60	M8	1.25	8	38	16	4	3	14	8000	150
FNFS-60-M10-41-B2-X	60	M10	1.5	10	41	16	4	3	14	13000	151
FNFS-60-M12-45-B2-X	60	M12	1.75	12	45	16	4	3	17	20000	182
FNFS-60-M16-50-B2-X	60	M16	2	16	50	16	4	3	22	25000	245
FNFS-80-M8-40-B2-X	80	M8	1.25	8	40	18	5	3	14	8000	250
FNFS-80-M10-43-B2-X	80	M10	1.5	10	43	18	5	3	14	13000	251
FNFS-80-M12-47-B2-X	80	M12	1.75	12	47	18	5	3	17	15000	271
FNFS-80-M16-52-B2-X	80	M16	2	16	52	18	5	3	22	15000	314
FNFS-80-M20-60-B2-X	80	M20	2.5	20	60	18	5	3	27	15000	390
FNFS-100-M8-42-B2-X	100	M8	1.25	8	42	20	6	3	14	8000	390
FNFS-100-M10-45-B2-X	100	M10	1.5	10	45	20	6	3	14	13000	391
FNFS-100-M12-49-B2-X	100	M12	1.75	12	49	20	6	3	17	14000	411
FNFS-100-M16-54-B2-X	100	M16	2	16	54	20	6	3	22	14000	454
FNFS-100-M20-62-B2-X	100	M20	2.5	20	62	20	6	3	27	14000	530
FNFS-120-M20-65-B2-X	120	M20	2.5	20	65	22	6	4	27	22000	800

*1：静态容许载荷为无橡胶膜片的值。也是螺丝垂直于垫的状态下的值。在螺丝带角度的状态下，会发生弯曲和屈曲应力，导致静态容许载荷变小。
表中数值非保证值，仅供参考。

- 型号指定

FNFS-80-M16-52-B1-X

1

无尘洗净・无尘包装 → P.0000	螺纹切割 → P.0000	防松动 → P.0000	激光刻印 → P.0000
不可对应	不可对应	不可对应	欢迎洽询