


D=80-125

D=60



● 材质、表面处理

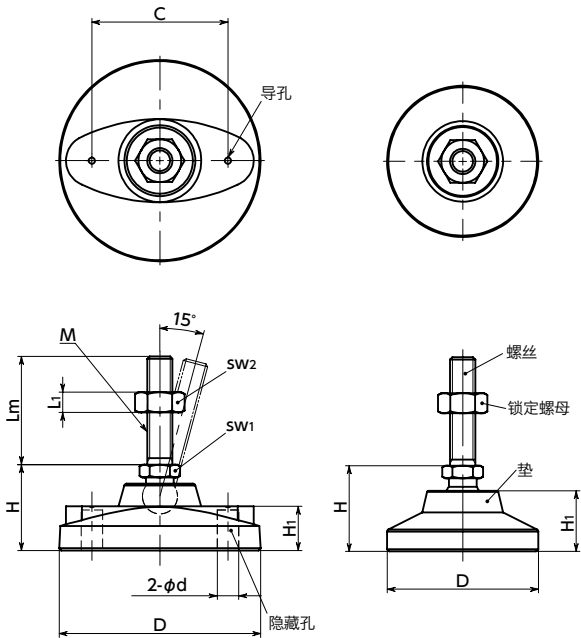

	FPM / FPM-H
螺丝	钢 三价铬酸盐处理
垫	玻璃纤维增强尼龙6 (亚光黑)
锁定螺母	钢 三价铬酸盐处理

尺寸

FPM 重载型 FPM-H 超重载型

单位：mm

型号	D	M(粗牙)		H	H ₁	d	C	sw1	sw2	L ₁	静态容许载荷*1 (N)	质量(g)
		螺纹公称直径	螺距									
FPM-60-M8	60	M8	1.25	34	24	—	—	14	13	6.5	14000	70 - 77
FPM-60-M10	60	M10	1.5	34	24	—	—	14	17	8	14000	76 - 124
FPM-60-M12	60	M12	1.75	34	24	—	—	14	19	10	14000	89 - 153
FPM-60-M14	60	M14	2	34	24	—	—	14	22	11	14000	138 - 215
FPM-60-M16	60	M16	2	34	24	—	—	16	24	13	14000	156 - 330
FPM-80-M8	80	M8	1.25	34	17.5	8.5	54	14	13	6.5	14000	100 - 120
FPM-80-M10	80	M10	1.5	34	17.5	8.5	54	14	17	8	16000	106 - 165
FPM-80-M12	80	M12	1.75	34	17.5	8.5	54	14	19	10	16000	119 - 194
FPM-80-M14	80	M14	2	34	17.5	8.5	54	14	22	11	16000	157 - 249
FPM-80-M16	80	M16	2	34	17.5	8.5	54	16	24	13	16000	186 - 371
FPM-60-M16-H	60	M16	2	44	24	—	—	24	24	13	18000	219 - 391
FPM-60-M20-H	60	M20	2.5	44	24	—	—	24	30	16	18000	366 - 626
FPM-60-M24-H	60	M24	3	44	24	—	—	24	36	19	18000	439 - 839
FPM-80-M16-H	80	M16	2	44	17.5	8.5	54	24	24	13	18000	249 - 432
FPM-80-M20-H	80	M20	2.5	44	17.5	8.5	54	24	30	16	18000	396 - 667
FPM-80-M24-H	80	M24	3	44	17.5	8.5	54	24	36	19	18000	469 - 880
FPM-100-M16-H	100	M16	2	51	20.5	12.5	70	24	24	13	25000	269 - 481
FPM-100-M20-H	100	M20	2.5	51	20.5	12.5	70	24	30	16	25000	416 - 716
FPM-100-M24-H	100	M24	3	51	20.5	12.5	70	24	36	19	25000	489 - 929
FPM-125-M16-H	125	M16	2	66	29	12.5	95	24	24	13	28000	389 - 635
FPM-125-M20-H	125	M20	2.5	66	29	12.5	95	24	30	16	28000	536 - 870
FPM-125-M24-H	125	M24	3	66	29	12.5	95	24	36	19	28000	609 - 1090

*1：表中数值为螺丝垂直于垫的状态下的值。在螺丝带角度的状态下，会发生弯曲和屈曲应力，导致静态容许载荷变小。
表中数值非保证值，仅供参考。

- 重载型调平调节器。
- 螺纹采用钢制。耐久性优良。
- 最适用于传送线等的调平。
- 垫最大可倾斜15°。适用于倾斜面。
- 螺纹直径M8至M24已实现标准化。
- 载荷更大的用途请使用超重载型 **FPM-H**。
- 垫直径φ80以上的产品中，地脚螺栓用的隐藏孔和孔加工用的导孔各有2个。

- 可根据产品符号选择载荷类型。

产品符号	载荷类型
FPM	重载型
FPM-H	超重载型

FPM 重载型 FPM-H 超重载型

型号	Lm (mm) 2									
	43	58	68	98	108	138	148	158	168	198
FPM-60-M8	●		●							
FPM-60-M10	●		●	●						
FPM-60-M12	●		●	●						
FPM-60-M14			●	●			●			
FPM-60-M16			●		●		●		●	
FPM-80-M8	●		●							
FPM-80-M10	●		●	●						
FPM-80-M12	●		●	●						
FPM-80-M14			●	●			●			
FPM-80-M16			●		●		●		●	
FPM-60-M16-H		●		●		●		●		
FPM-60-M20-H				●		●		●		●
FPM-60-M24-H				●		●		●		●
FPM-80-M16-H		●		●		●		●		
FPM-80-M20-H				●		●		●		●
FPM-80-M24-H				●		●		●		●
FPM-100-M16-H		●		●		●		●		
FPM-100-M20-H				●		●		●		●
FPM-100-M24-H				●		●		●		●
FPM-125-M16-H		●		●		●		●		
FPM-125-M20-H				●		●		●		●
FPM-125-M24-H				●		●		●		●

- 型号指定

FPM-60-M16-98-H



2 螺纹长度Lm请从表中标有●的尺寸中选择。

无尘洗净・无尘包装 → P.xxxx	螺纹切割 → P.xxxx	防松动 → P.xxxx	激光刻印 → P.xxxx
不可对应	可对应，费用另计	不可对应	欢迎洽询