




● 材质、表面处理

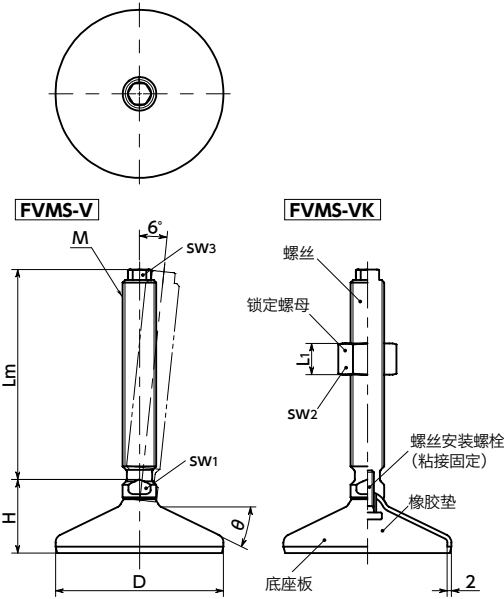

	FVMS-V	FVMS-VK
螺丝	SUS303	SUS303
底座板	SUS304	SUS304
螺丝安装螺栓	不锈钢	不锈钢
橡胶垫	NBR (黑) 肖氏硬度A85±5	NBR (黑) 肖氏硬度A85±5
锁定螺母	—	SUS304

尺寸

FVMS-V 无锁定螺母 FVMS-VK 带锁定螺母

单位：mm

型号 	D	M (粗牙)		H	sw1	sw2	sw3	L1	θ (°)	静态容许载荷*1 (N)	质量 (g)
		螺纹公称直径	螺距								
FVMS-60-M16-C3-V	60	M16	2	33	12	—	10	—	32	14000	200 - 299
FVMS-80-M16-C3-V	80	M16	2	35	12	—	10	—	26	14000	273 - 372
FVMS-80-M20-C3-V	80	M20	2.5	36	16	—	13	—	26	32000	388 - 596
FVMS-80-M24-C3-V	80	M24	3	38	20	—	17	—	26	36000	491 - 785
FVMS-100-M16-C3-V	100	M16	2	37	12	—	10	—	22	24000	368 - 467
FVMS-100-M20-C3-V	100	M20	2.5	38	16	—	13	—	22	26000	483 - 691
FVMS-100-M24-C3-V	100	M24	3	40	20	—	17	—	22	28000	586 - 880
FVMS-60-M16-C3-VK	60	M16	2	33	12	24	10	14.8	32	14000	229 - 328
FVMS-80-M16-C3-VK	80	M16	2	35	12	24	10	14.8	26	14000	302 - 401
FVMS-80-M20-C3-VK	80	M20	2.5	36	16	30	13	18	26	32000	440 - 648
FVMS-80-M24-C3-VK	80	M24	3	38	20	36	17	21.5	26	36000	583 - 877
FVMS-100-M16-C3-VK	100	M16	2	37	12	24	10	14.8	22	24000	397 - 496
FVMS-100-M20-C3-VK	100	M20	2.5	38	16	30	13	18	22	26000	535 - 743
FVMS-100-M24-C3-VK	100	M24	3	40	20	36	17	21.5	22	28000	678 - 972

*1：是螺丝垂直于底座的状态下的值。在螺丝带角度的状态下，会发生弯曲和屈曲应力，导致静态容许载荷变小。
表中数值非保证值，仅供参考。

 无尘洗净・无尘包装 → P. xxxx	 螺纹切割 → P. xxxx	 防松动 → P. xxxx	 激光刻印 → P. xxxx
不可对应	欢迎洽询	不可对应	欢迎洽询

● 型号指定

FVMS-80-M16 - 125 - C3-VK



2 螺纹长度 Lm 请从表中标有 ● 的尺寸中选择。



FVMS-V 无锁定螺母 FVMS-VK 带锁定螺母

型号	Lm (mm) 				
	75	100	125	150	200
FVMS-60-M16-C3-V	●	●	●	●	
FVMS-80-M16-C3-V	●	●	●	●	
FVMS-80-M20-C3-V		●	●	●	●
FVMS-80-M24-C3-V		●		●	●
FVMS-100-M16-C3-V	●	●	●	●	
FVMS-100-M20-C3-V		●	●	●	●
FVMS-100-M24-C3-V		●		●	●
FVMS-60-M16-C3-VK	●	●	●	●	
FVMS-80-M16-C3-VK	●	●	●	●	
FVMS-80-M20-C3-VK		●	●	●	●
FVMS-80-M24-C3-VK		●		●	●
FVMS-100-M16-C3-VK	●	●	●	●	
FVMS-100-M20-C3-VK		●	●	●	●
FVMS-100-M24-C3-VK		●		●	●