


SNS-M-P 内六角圆柱头螺栓(细牙螺纹)

高强度 高比强度



● 材质、表面处理

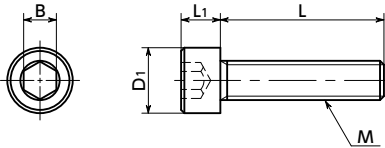

	SNS-M-P
主体	SCM435 四氧化三铁保护膜(黑)
强度等级	12.9



- 符合JIS B 1176, ISO 12474, DIN 912标准。
- 强度等级为12.9。高强度产品。
- 与粗牙螺纹相比,有效直径更大,疲劳强度更高。
- 螺距小,螺纹牙数比粗牙螺纹多。适用于粗牙螺纹无法确保足够螺牙的情况。
- 因为螺牙的导程角比粗牙螺纹小,所以螺牙面不易滑动,有防止松动的效果。

● 用途

防松动对策
薄板等的固定

单位: mm

型号 	M(细牙)		L 												D ₁	L ₁	B	质量 (g)
	螺纹公称直径	螺距																
SNS-M6-P0.75	M6	0.75	10	12	15	20	25							10	6	5	4.8 - 7.3	
SNS-M8-P1	M8	1		12	15	20	25	30						13	8	6	11 - 17	
SNS-M10-P1.25	M10	1.25			15	20	25	30	35	40				16	10	8	21 - 33	
SNS-M12-P1.25	M12	1.25				20	25	30	35	40	45	50		18	12	10	34 - 56	
SNS-M16-P1.5	M16	1.5					25	30	35	40	45	50	60	24	16	14	78 - 124	

● 型号指定

SNS-M8-P1 - 20



 散装零售 → P.xxxx	 无尘洗净・无尘包装 → P.xxxx	 螺纹切割 → P.xxxx	 防松动 → P.xxxx	 防脱落加工 → P.xxxx
本产品每包1个	不可对应	可对应, 费用另计	可对应, 费用另计	欢迎洽询