


JDF/JDFS 带座磁铁

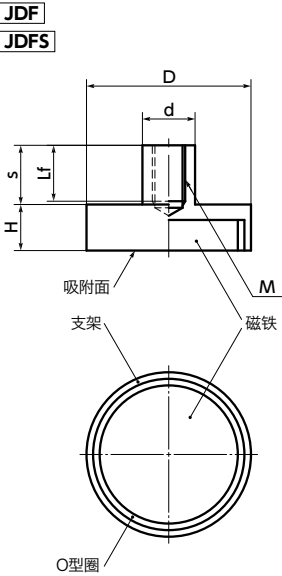

- 内螺纹平板型带座磁铁。
- 使用金属座包覆磁铁，提高了吸附力。➡ P.xxxx
- 三种磁铁已实现标准化。
- **JDF** ———— 钢制底座
- **JDFS** ———— 不锈钢制底座

JDF-HF 永磁铁氧体/底座：钢制

单位：mm

型号 	吸附力 (N)	D	M (粗牙)		Lf	H	d	s	质量 (g)
			螺纹公称直径	螺距					
JDF-HF-10-M3	4	10 ±0.1	M3	0.5	5	4.5 ^{+0.2} _{-0.1}	6 ±0.1	7	4
JDF-HF-13-M3	10	13 ±0.1	M3	0.5	5	4.5 ^{+0.2} _{-0.1}	6 ±0.1	7	6
JDF-HF-16-M3	18	16 ±0.1	M3	0.5	5	4.5 ^{+0.2} _{-0.1}	6 ±0.1	7	8
JDF-HF-20-M3	30	20 ±0.1	M3	0.5	5	6 ^{+0.2} _{-0.1}	6 ±0.1	7	16
JDF-HF-25-M4	40	25 ±0.1	M4	0.7	7	7 ^{+0.3} _{-0.2}	8 ±0.2	8	33
JDF-HF-32-M4	80	32 ±0.1	M4	0.7	7	7 ^{+0.3} _{-0.2}	8 ±0.2	8	52
JDF-HF-40-M5	125	40 ^{+0.2} _{-0.1}	M5	0.8	8	8 ^{+0.3} _{-0.2}	10 ±0.2	10	82
JDF-HF-50-M6	220	50 ^{+0.2} _{-0.1}	M6	1	10	10 ^{+0.4} _{-0.2}	12 ±0.2	12	159
JDF-HF-63-M8	350	63 ^{+0.3} _{-0.1}	M8	1.25	10	14 ^{+0.5} _{-0.2}	15 ±0.2	16	352
JDF-HF-80-M10	600	80 ^{+0.3} _{-0.1}	M10	1.5	15	18 ^{+0.5} _{-0.2}	20 ±0.2	16	725
JDF-HF-100-M12	900	100 ^{+0.5} _{-0.1}	M12	1.75	18	22 ^{+0.5} _{-0.2}	22 ±0.2	21	1370
JDF-HF-125-M14	1300	125 ^{+0.5} _{-0.1}	M14	2	20	26 ^{+0.5} _{-0.2}	25 ±0.2	24	2520

JDF-SC 钕钴

单位：mm

型号 	吸附力 (N)	D	M (粗牙)		Lf	H	d	s	质量 (g)
			螺纹公称直径	螺距					
JDF-SC-6-M3	5	6 ±0.1	M3	0.5	6	4.5 ±0.1	6 ±0.1	7	2
JDF-SC-8-M3	11	8 ±0.1	M3	0.5	6	4.5 ±0.1	6 ±0.1	7	3
JDF-SC-10-M3	20	10 ±0.1	M3	0.5	6	4.5 ±0.1	6 ±0.1	7	4
JDF-SC-13-M3	40	13 ±0.1	M3	0.5	6	4.5 ±0.1	6 ±0.1	7	6
JDF-SC-16-M4	60	16 ±0.1	M4	0.7	6	4.5 ±0.1	6 ±0.1	7	8
JDF-SC-20-M4	90	20 ±0.1	M4	0.7	7	6 ±0.1	8 ±0.2	7	16
JDF-SC-25-M4	150	25 ±0.1	M4	0.7	7	7 ±0.2	8 ±0.2	7	33
JDF-SC-32-M5	220	32 ±0.1	M5	0.8	8	7 ±0.2	10 ±0.2	8.5	52

● 材质、表面处理



	JDF-HF	JDF-SC	JDF-ND	JDFS-HF
磁铁	永磁铁氧体	钕钴	钕 镀镍	永磁铁氧体
底座	相当于SPCC 三价铬酸盐处理	相当于SPCC 三价铬酸盐处理	相当于SPCC 三价铬酸盐处理	相当于SUS430
O型圈	尼龙66	尼龙66	尼龙66	PPS
耐热温度	200℃	200℃	80℃	220℃

JDF-ND 钕

单位：mm

型号 	吸附力 (N)	D	M (粗牙)		Lf	H	d	s	质量 (g)
			螺纹公称直径	螺距					
JDF-ND-6-M3	5	6 ±0.1	M3	0.5	6	4.5 ±0.1	6 ±0.1	7	2
JDF-ND-8-M3	13	8 ±0.1	M3	0.5	6	4.5 ±0.1	6 ±0.1	7	3
JDF-ND-10-M3	25	10 ±0.1	M3	0.5	6	4.5 ±0.1	6 ±0.1	7	4
JDF-ND-13-M3	60	13 ±0.1	M3	0.5	6	4.5 ±0.1	6 ±0.1	7	6
JDF-ND-16-M4	95	16 ±0.1	M4	0.7	6	4.5 ±0.1	6 ±0.1	7	8
JDF-ND-20-M4	140	20 ±0.1	M4	0.7	7	6 ±0.1	8 ±0.2	7	16
JDF-ND-25-M4	200	25 ±0.1	M4	0.7	7	7 ±0.2	8 ±0.2	7	33
JDF-ND-32-M5	350	32 ±0.1	M5	0.8	8	7 ±0.2	10 ±0.2	8.5	52

JDFS-HF 永磁铁氧体/底座：不锈钢制

单位：mm

型号 	吸附力 (N)	D	M (粗牙)		Lf	H	d	s	质量 (g)
			螺纹公称直径	螺距					
JDFS-HF-25-M5	32	25 ±0.1	M5	0.8	8.25	7 ^{+0.3} _{-0.2}	8	9	33
JDFS-HF-32-M5	64	32 ±0.1	M5	0.8	9	7 ^{+0.3} _{-0.2}	8	9	52
JDFS-HF-40-M5	100	40 ^{+0.2} _{-0.1}	M5	0.8	9	8 ^{+0.3} _{-0.2}	8	8.5	82
JDFS-HF-50-M5	175	50 ^{+0.2} _{-0.1}	M5	0.8	9	10 ^{+0.4} _{-0.2}	8	8.5	159
JDFS-HF-63-M5	280	63 ^{+0.3} _{-0.1}	M5	0.8	9	14 ^{+0.5} _{-0.2}	8	8	352

● 型号指定

JDF-HF-20-M3

