


MOR 挠性联轴器 - 十字滑块型 - 定位螺丝固定型

高扭矩 电绝缘性 容许误差调整量大 偏心反作用力小

MOR

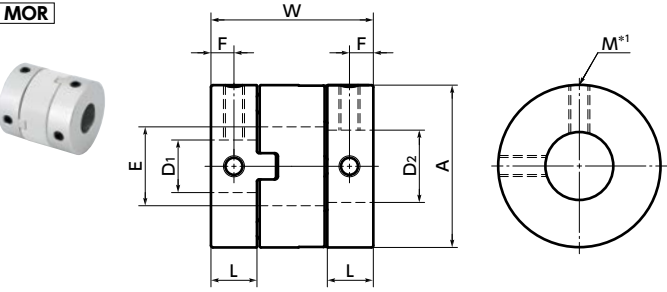

※1：轴孔径为φ4以下时，附带1个止动螺丝。

尺寸

单位：mm

型号	A	L	W	E	F	M	螺丝紧固扭矩 (N・m)
MOR-6	6	2.5	8.4	2.1	1.3	M2	0.3
MOR-8	8	2.5	9.6	3.1	1.3	M2	0.3
MOR-10	10	2.9	10.4	4.1	1.4	M2	0.3
MOR-12	12	3.9	14.4	5.2	2	M3	0.7
MOR-15	15	4.4	16	8.2	2.2	M3	0.7
MOR-17	17	4.9	19.7	8.2	2.5	M3	0.7
MOR-20	20	5.8	21.6	12.2	2.9	M4(4≤轴孔径 D1・D2≤10) M3(10<轴孔径 D1・D2≤12)	1.7 0.7
MOR-26	26	7.3	25.6	14.2	3.7	M4	1.7
MOR-30	30	10	32.6	16.2	5	M4	1.7
MOR-34	34	11.1	34	16.2	5.6	M5	4
MOR-38	38	12.1	40.1	20.3	6.1	M5	4
MOR-45	45	13.8	46	22.3	6.9	M6	7
MOR-55	55	18.7	57	26.5	9.4	M8	15
MOR-68	68	24	77	38.5	12	M10	30

型号	标准轴孔径 D1・D2(尺寸容许偏差H8)																			
	1	1.5	2	3	4	5	6	6.35	8	9.525	10	12	14	15	16	18	20	22	25	28
MOR-6	●	●	●																	
MOR-8	●		●	●																
MOR-10			●	●	●															
MOR-12				●	●	●														
MOR-15					●	●	●	●	●											
MOR-17					●	●	●	●	●											
MOR-20					●	●	●	●	●	●	●									
MOR-26						●	●	●	●	●	●	●	●							
MOR-30									●	●	●	●	●	●	●					
MOR-34										●	●	●	●	●	●	●	●			
MOR-38											●	●	●	●	●	●	●	●	●	
MOR-45												●	●	●	●	●	●	●	●	●
MOR-55													●	●	●	●	●	●	●	●
MOR-68														●	●	●	●	●	●	●

- 所有产品均附带内六角止动螺丝。
- 适用轴径的推荐尺寸公差为h6及h7。
- 也承接1个轴套是定位螺丝固定型，另1个轴套是夹紧型等组合的订货。
- 轴插入联轴器中的量请参阅安装与维护说明。→ P.xxxx

轴孔・键槽追加加工 → P.xxxx	无尘洗净・无尘包装 → P.xxxx	变更为不锈钢螺丝 → P.xxxx
可对应, 费用另计	欢迎洽询	可对应, 费用另计


性能

型号	最大轴孔径 (mm)	键槽追加加工 最大轴孔径 (mm)	额定扭矩*1 (N・m)	最大扭矩*1 (N・m)	最高转速 (min ⁻¹)	惯性力矩*2 (kg・m ²)	静态 扭转刚性 (N・m/rad)	容许偏心 (mm)	容许偏角 (°)	质量*2 (g)
MOR-6	2	—	0.2	0.4	100000	2.2×10 ⁻⁹	5	0.5	3	0.4
MOR-8	3	—	0.5	1	78000	7.4×10 ⁻⁹	12	0.7	3	0.8
MOR-10	4	—	0.8	1.6	63000	1.9×10 ⁻⁸	23	0.9	3	1
MOR-12	5	—	1	2	52000	5.3×10 ⁻⁸	60	1	3	3
MOR-15	8	8	1.6	3.2	42000	1.4×10 ⁻⁷	80	1	3	4
MOR-17	8	8	2.2	4.4	37000	2.8×10 ⁻⁷	120	1.2	3	7
MOR-20	12	12	3.2	6.4	31000	5.7×10 ⁻⁷	120	1.2	3	9
MOR-26	14	14	6	12	24000	2.1×10 ⁻⁶	300	1.5	3	20
MOR-30	16	16	15	30	21000	5.4×10 ⁻⁶	530	2	3	38
MOR-34	16	16	16	32	18000	9.1×10 ⁻⁶	1000	2.5	3	52
MOR-38	20	20	28	56	16000	1.6×10 ⁻⁵	1500	2.5	3	69
MOR-45	22	22	30	60	14000	3.3×10 ⁻⁵	2400	3	3	110
MOR-55	26	26	45	90	11000	1.0×10 ⁻⁴	4100	4	3	230
MOR-68	38	38	80	160	9000	3.7×10 ⁻⁴	6400	4.5	3	430

※1：无负荷变动，并且向某一方向旋转时的值。负荷变动大，或进行正反转时，请在选择尺寸时留出余裕。当环境温度高于30℃时，请依据下表的温度修正系数调整额定扭矩和最大扭矩。

※2：最大扭矩时的值。

额定扭矩的比较

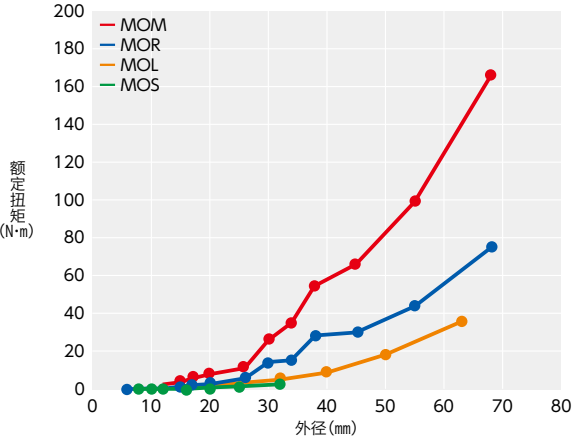

环境温度、温度修正系数

环境温度	温度修正系数
-20℃~30℃	1.00
30℃~40℃	0.80
40℃~60℃	0.70
60℃~80℃	0.55

型号指定

MOR-15-5-6 1套

1

MOR-20-SPCR 单件间隔体

产品 符号	外径 (A尺 寸)	单件间隔体
----------	-----------------	-------