

● 材质、表面处理

	SWNB
主体	黄铜




- 黄铜制薄型螺母。
- 将公制细牙螺纹和平行管螺纹标准化。
- 用于固定安装部壁厚薄的配管连接零件、螺塞。

● 用途

螺塞的固定
配管、流体设备的连接

型号	M (细牙)		G (PF)	B	C	T	质量 (g)
	螺纹公称直径	螺距	螺纹公称直径				
SWNB-M12	M12	1.5	—	16	17.5	3	1.2
SWNB-M14	M14	1.5	—	18	19.5	3	1.6
SWNB-M16	M16	1.5	—	21	23	3	1.4
SWNB-M20	M20	1.5	—	24	26	4	6.4
SWNB-M26	M26	1.5	—	30	32.5	4	8.5
SWNB-M27	M27	1.5	—	32	34.5	4	10
SWNB-M33	M33	1.5	—	41	44.5	5	25
SWNB-M40	M40	1.5	—	46	50.5	5	24
SWNB-M42	M42	1.5	—	50	54.5	5	32
SWNB-2	—	—	G1/4	16	17.5	3	1
SWNB-3	—	—	G3/8	21	23	3	2
SWNB-4	—	—	G1/2	24	26	4	6
SWNB-6	—	—	G3/4	30	32.5	4	8
SWNB-8	—	—	G1	41	44.5	5	25
SWNB-10	—	—	G1 - 1/4	46	50.5	5	21
SWNB-12	—	—	G1 - 1/2	55	61	6	43
SWNB-16	—	—	G2	65	72	6	45


● 安装方法



型号	推荐安装孔径 φd
SWNB-M12	12
SWNB-M14	14
SWNB-M16	16
SWNB-M20	20
SWNB-M26	26
SWNB-M27	27
SWNB-M33	33
SWNB-M40	40
SWNB-M42	42
SWNB-2	13.2
SWNB-3	16.7
SWNB-4	21
SWNB-6	26.5
SWNB-8	33.3
SWNB-10	42
SWNB-12	47.9
SWNB-16	59.7



● 使用例

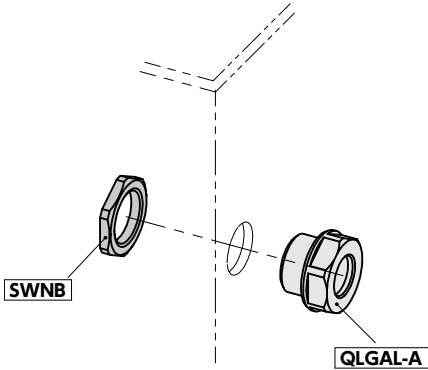

● 型号指定

SWNB-3



1 散裝零售 → P. xxxx	无粉尘洗净・无尘包装 → P. xxxx	螺紋切割 → P. xxxx	防松動 → P. xxxx	防脫落加工 → P. xxxx
本产品每包 1 个	不可对应	不可对应	不可对应	不可对应