


SCB-FB 夹紧螺栓 - 平面头钢球型 - 带防反转结构



● 材质、表面处理

	SCB-FB 钢制
螺纹部	SCM435 四氧化三铁保护膜(黑)
球	SUJ2(硬度 62 - 67HRC)

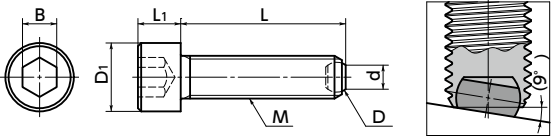

● 型号指定

SCB-M6-20-FB



- 所有尺寸均标准化为全螺纹。
- 球可灵活旋转通过防反转结构，始终利用球的平面部牢牢地夹紧。
- 也生产螺纹公称直径、螺纹长度与表面处理等特殊规格的产品。请垂询客户中心。

SCBS-FB

SCB-FB

型号 钢制	M(粗牙)		L	D ₁	D	d(参考值)	L ₁	B	质量(g)
	螺纹公称直径	螺距							
SCB-M4-10-FB	M4	0.7	10	7	2.5	1.9	4	3	1.5
SCB-M4-12-FB	M4	0.7	12	7	2.5	1.9	4	3	1.7
SCB-M4-16-FB	M4	0.7	16	7	2.5	1.9	4	3	1.9
SCB-M4-20-FB	M4	0.7	20	7	2.5	1.9	4	3	2.2
SCB-M4-25-FB	M4	0.7	25	7	2.5	1.9	4	3	2.5
SCB-M5-12-FB	M5	0.8	12	8.5	3	2.4	5	4	2.9
SCB-M5-16-FB	M5	0.8	16	8.5	3	2.4	5	4	3.4
SCB-M5-20-FB	M5	0.8	20	8.5	3	2.4	5	4	3.9
SCB-M5-25-FB	M5	0.8	25	8.5	3	2.4	5	4	4.4
SCB-M5-30-FB	M5	0.8	30	8.5	3	2.4	5	4	5
SCB-M6-16-FB	M6	1	16	10	4	3.1	6	5	5.6
SCB-M6-20-FB	M6	1	20	10	4	3.1	6	5	6.5
SCB-M6-25-FB	M6	1	25	10	4	3.1	6	5	7.6
SCB-M6-30-FB	M6	1	30	10	4	3.1	6	5	8.7
SCB-M6-40-FB	M6	1	40	10	4	3.1	6	5	11
SCB-M8-20-FB	M8	1.25	20	13	5.56	4.6	8	6	13.5
SCB-M8-30-FB	M8	1.25	30	13	5.56	4.6	8	6	17.5
SCB-M8-35-FB	M8	1.25	35	13	5.56	4.6	8	6	19
SCB-M8-40-FB	M8	1.25	40	13	5.56	4.6	8	6	21.5
SCB-M8-50-FB	M8	1.25	50	13	5.56	4.6	8	6	25
SCB-M10-25-FB	M10	1.5	25	16	7.14	6.1	10	8	26
SCB-M10-30-FB	M10	1.5	30	16	7.14	6.1	10	8	29
SCB-M10-40-FB	M10	1.5	40	16	7.14	6.1	10	8	34
SCB-M10-50-FB	M10	1.5	50	16	7.14	6.1	10	8	39
SCB-M10-60-FB	M10	1.5	60	16	7.14	6.1	10	8	47
SCB-M12-30-FB	M12	1.75	30	18	8.5	7.3	12	10	40
SCB-M12-50-FB	M12	1.75	50	18	8.5	7.3	12	10	56
SCB-M12-80-FB	M12	1.75	80	18	8.5	7.3	12	10	83
SCB-M16-40-FB	M16	2	40	24	12	10.7	16	14	91
SCB-M16-60-FB	M16	2	60	24	12	10.7	16	14	122
SCB-M16-80-FB	M16	2	80	24	12	10.7	16	14	154

单位: mm

无尘洗净・无尘包装 → P.xxxx	螺纹组合 → P.xxxx	螺纹切割 → P.xxxx	防松动 → P.xxxx
欢迎洽询	不可对应	不可对应	可对应, 费用另计