

● 材质、表面处理



	SCS-F-R
螺纹部	SCM435 四氧化三铁保护膜(黑)
球	SUJ2 (硬度 62 - 67HRC)




- 便于进行螺纹旋入量微调的细牙螺纹型夹紧螺丝。
- 通过整球的点接触，牢牢地固定工件。
- 用于刀夹的止动螺丝、压力件或挡块等。
- 也生产螺纹公称直径、螺纹长度与表面处理等特殊规格的产品。请垂询客户中心。

单位：mm

型号 	M(细牙)		L	D	B	容许载荷(N)	质量(g)
	螺纹公称直径	螺距					
SCS-M6F-10-R	M6	0.75	10.8	4	3	9000	1.5
SCS-M6F-16-R	M6	0.75	16.8	4	3	9000	2.5
SCS-M6F-20-R	M6	0.75	20.8	4	3	9000	3.4
SCS-M6F-25-R	M6	0.75	25.8	4	3	9000	4
SCS-M8F-12-R	M8	1	13.2	5.56	4	15000	3.2
SCS-M8F-20-R	M8	1	21.2	5.56	4	15000	5.7
SCS-M8F-25-R	M8	1	26.2	5.56	4	15000	7.7
SCS-M8F-30-R	M8	1	31.2	5.56	4	15000	9
SCS-M10F-16-R	M10	1	17.7	7	5	24000	7
SCS-M10F-20-R	M10	1	21.7	7	5	24000	9.5
SCS-M10F-25-R	M10	1	26.7	7	5	24000	11
SCS-M10F-35-R	M10	1	36.7	7	5	24000	16
SCS-M12F-20-R	M12	1.5	22	8.5	6	30000	12.5
SCS-M12F-30-R	M12	1.5	32	8.5	6	30000	20
SCS-M12F-40-R	M12	1.5	42	8.5	6	30000	28

● 使用例

用于固定易损伤工件。

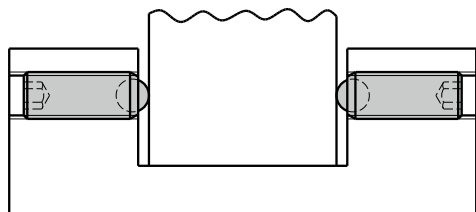

● 型号指定

SCS-M6F-25-R


 无尘洗净・无尘包装 → P. xxxx

不可对应

 螺纹组合 → P. xxxx

不可对应

 螺纹切削 → P. xxxx

不可对应

 防松动 → P. xxxx

可对应, 费用另计