


SCSS-FB 夹紧螺丝 - 平面头钢球型 - 带防反转结构

SUS 不锈钢



● 材质、表面处理

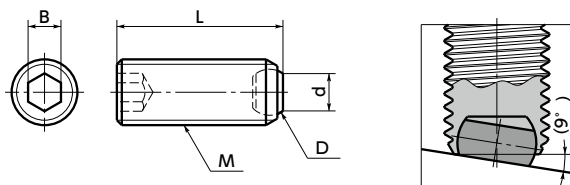

	SCSS-FB 不锈钢制
螺纹部	相当于 SUS304
球	SUS440C (硬度 59 - 66HRC)



- 球可灵活旋转通过防反转结构，始终利用球的平面部牢牢地夹紧。
- 也生产螺纹公称直径、螺纹长度与表面处理等特殊规格的产品。请垂询客户中心。

单位：mm

型号 1 不锈钢制	M (粗牙)		L	D	d (参考值)	B	质量 (g)
	螺纹公称直径	螺距					
SCSS-M4-6-FB	M4	0.7	6	2.5	1.9	2	0.4
SCSS-M4-10-FB	M4	0.7	10	2.5	1.9	2	0.7
SCSS-M4-16-FB	M4	0.7	16	2.5	1.9	2	1
SCSS-M5-8-FB	M5	0.8	8	3	2.4	2.5	0.8
SCSS-M5-12-FB	M5	0.8	12	3	2.4	2.5	1.3
SCSS-M5-20-FB	M5	0.8	20	3	2.4	2.5	2.3
SCSS-M6-10-FB	M6	1	10	4	3.1	3	1.5
SCSS-M6-16-FB	M6	1	16	4	3.1	3	2.5
SCSS-M6-20-FB	M6	1	20	4	3.1	3	3.4
SCSS-M6-25-FB	M6	1	25	4	3.1	3	4
SCSS-M8-10-FB	M8	1.25	10	5.56	4.6	4	2.5
SCSS-M8-12-FB	M8	1.25	12	5.56	4.6	4	3.2
SCSS-M8-20-FB	M8	1.25	20	5.56	4.6	4	5.7
SCSS-M8-25-FB	M8	1.25	25	5.56	4.6	4	7.7
SCSS-M8-30-FB	M8	1.25	30	5.56	4.6	4	9
SCSS-M10-12-FB	M10	1.5	12	7.14	6.1	5	5
SCSS-M10-16-FB	M10	1.5	16	7.14	6.1	5	7
SCSS-M10-20-FB	M10	1.5	20	7.14	6.1	5	9.5
SCSS-M10-25-FB	M10	1.5	25	7.14	6.1	5	11
SCSS-M10-35-FB	M10	1.5	35	7.14	6.1	5	16
SCSS-M12-16-FB	M12	1.75	16	7.94	7.3	6	10
SCSS-M12-20-FB	M12	1.75	20	7.94	7.3	6	12.5
SCSS-M12-30-FB	M12	1.75	30	7.94	7.3	6	20
SCSS-M12-40-FB	M12	1.75	40	7.94	7.3	6	28
SCSS-M16-20-FB	M16	2	20	11.91	10.7	8	22
SCSS-M16-25-FB	M16	2	25	11.91	10.7	8	28
SCSS-M16-35-FB	M16	2	35	11.91	10.7	8	41
SCSS-M16-50-FB	M16	2	50	11.91	10.7	8	48

- SCSS-M8-10-FB | SCSS-M10-12-FB | SCSS-M12-16-FB | SCSS-M16-20-FB 的内六角孔深度较浅。

● 型号指定

SCSS-M6-25-FB

无尘洗净・无尘包装 → P.xxxx

欢迎洽询

螺纹组合 → P.xxxx

可对应，费用另计

螺纹切割 → P.xxxx

不可对应

防松动 → P.xxxx

可对应，费用另计