


NSCS-SN2 固定轴环 - 带固定孔(内螺纹) - 不锈钢制 - 夹紧型

SUS 不锈钢



● 材质、表面处理

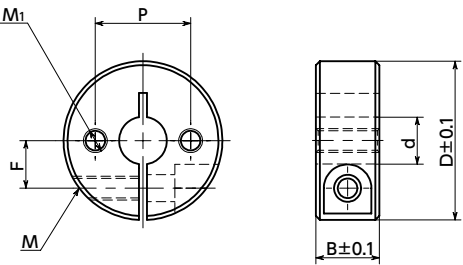

	NSCS-SN2
主体	SUS304
内六角圆柱头螺栓	SUSXM7

- 带固定孔(内螺纹)的固定轴环。可使用固定孔(内螺纹)，安装至轮、法兰、板等所有机械和装置上。
- 夹紧型。便于安装、拆卸，不会损伤轴。
- 最适用于滑动轴等安装、拆卸频繁的机械和装置。



单位：mm

型号	d	B	D	F	P	M(粗牙)*1	M1(粗牙)*2		质量(g)
							螺纹公称直径	螺距	
NSCS-6-8-SN2	6	8	20	6	12	M3	M3	0.5	16
NSCS-6-10-SN2	6	10	20	6	13	M3	M4	0.5	20
NSCS-8-8-SN2	8	8	25	8	14	M3	M3	0.5	24
NSCS-8-10-SN2	8	10	25	8	18	M4	M4	0.7	30
NSCS-8-12-SN2	8	12	28	8.5	18	M5	M5	0.8	46
NSCS-8-15-SN2	8	15	30	9.5	20	M5	M6	0.8	67
NSCS-10-10-SN2	10	10	30	9	20	M5	M4	0.8	42
NSCS-10-12-SN2	10	12	30	9	20	M5	M5	0.8	48
NSCS-10-15-SN2	10	15	35	10	24	M6	M6	1.0	90
NSCS-12-10-SN2	12	10	30	10	22	M5	M4	0.8	42
NSCS-12-12-SN2	12	12	30	10	22	M5	M5	0.8	50
NSCS-12-15-SN2	12	15	35	11	24	M6	M6	1.0	86
NSCS-13-10-SN2	13	10	30	10	22	M4	M4	0.7	40
NSCS-13-15-SN2	13	15	35	11	24	M6	M6	1.0	83
NSCS-15-10-SN2	15	10	32	11	23	M4	M4	0.7	45
NSCS-15-12-SN2	15	12	35	12	26	M5	M5	0.8	66
NSCS-15-15-SN2	15	15	40	13	28	M6	M6	1.0	113
NSCS-16-10-SN2	16	10	35	12	24	M4	M4	0.7	54
NSCS-16-12-SN2	16	12	35	12	26	M5	M5	0.8	65
NSCS-16-15-SN2	16	15	40	13	28	M6	M6	1.0	110
NSCS-20-10-SN2	20	10	40	14	28	M4	M4	0.7	68
NSCS-20-12-SN2	20	12	40	14	30	M5	M5	0.8	80
NSCS-20-15-SN2	20	15	45	15	34	M6	M6	1.0	134
NSCS-25-12-SN2	25	12	45	17	36	M5	M5	0.8	94
NSCS-25-15-SN2	25	15	50	18	38	M6	M6	1.0	158
NSCS-30-15-SN2	30	15	55	20	44	M6	M6	1.0	180
NSCS-35-15-SN2	35	15	60	23	48	M6	M6	1.0	202
NSCS-40-18-SN2	40	18	70	26	56	M8	M8	1.25	337
NSCS-50-22-SN2	50	22	85	32	68	M10	M10	1.5	589

*1： 附带紧固用内六角圆柱头螺栓。

*2： 不附带固定螺丝。请另行准备。

● 型号指定

NSCS-6-8-SN2



无尘洗净・无尘包装 → P. xxxx	螺纹切割 → P. xxxx	防松动 → P. xxxx	激光刻印 → P. xxxx
欢迎洽询	不可对应	不可对应	可对应, 费用另计



☎ 0512-5290-1560

✉ info@nbk1560-chn.com.cn

🌐 https://www.nbk1560-chn.com.cn/



☎ 0512-5290-1560

✉ info@nbk1560-chn.com.cn

🌐 https://www.nbk1560-chn.com.cn/