




# SKX Hexalobular Wrench



## Material/Finish

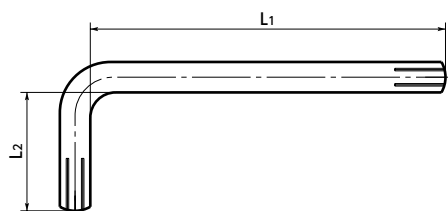

|           | SKX                                                                      |
|-----------|--------------------------------------------------------------------------|
| Main Body | Alloyed Steel (Hardness 50 HRC or higher)<br>Ferrosoferric Oxide Coating |

- Special keys for hexalobular socket head screws allow you to tighten at higher torques more safely.

➔ P.xxxx

\*The hexalobular shape is prescribed by JIS B 1015 : 2008 (ISO 10664 : 2005) "Hexalobular internal driving feature for bolts and screws".

## Application

Installing and removing hexalobular socket head screws

Unit : mm

| Part Number | Hexalobular Socket No. | A    | L1 | L2 | Mass (g) |
|-------------|------------------------|------|----|----|----------|
| SKX-4       | 4                      | 1.26 | 45 | 13 | 0.56     |
| SKX-5       | 5                      | 1.42 | 47 | 14 | 0.75     |
| SKX-6       | 6                      | 1.66 | 42 | 16 | 0.98     |
| SKX-8       | 8                      | 2.32 | 48 | 16 | 2.1      |
| SKX-10      | 10                     | 2.74 | 51 | 16 | 3.1      |
| SKX-15      | 15                     | 3.28 | 54 | 18 | 4.8      |
| SKX-20      | 20                     | 3.86 | 57 | 19 | 6.9      |
| SKX-25      | 25                     | 4.43 | 63 | 20 | 10       |
| SKX-30      | 30                     | 5.52 | 70 | 25 | 18       |
| SKX-40      | 40                     | 6.65 | 76 | 26 | 28       |
| SKX-45      | 45                     | 7.82 | 89 | 32 | 45       |

## Applicable Hexalobular Socket Head Screws

| Hexalobular Wrench | Applicable Hexalobular Socket Head Screws |        |           |            |           |            |           |            |            |                                                         |
|--------------------|-------------------------------------------|--------|-----------|------------|-----------|------------|-----------|------------|------------|---------------------------------------------------------|
|                    | SSTS                                      | SET    | SETS      | SLT        | SLTS      | SLEC-A     | SLEC-B    | SNPXS      | SNFXS      | SET-TZB(INCH)                                           |
| SKX-4              |                                           |        | SETS-M2   |            |           |            |           |            |            |                                                         |
| SKX-5              | SSTS-M2                                   |        | SETS-M2.6 |            |           |            |           |            |            |                                                         |
| SKX-6              | SSTS-M2.5                                 | SET-M3 | SETS-M3   |            | SLTS-M2   |            |           | SNPXS-M2   | SNFXS-M2   | SET-#6 - 32-TZB                                         |
| SKX-8              | SSTS-M3                                   | SET-M4 | SETS-M4   |            | SLTS-M2.5 |            |           | SNPXS-M2.5 | SNFXS-M2.5 | SET-#8 - 32-TZB<br>SET-#10 - 24-TZB<br>SET-#10 - 32-TZB |
| SKX-10             | SSTS-M4                                   | SET-M5 | SETS-M5   | SLT-M3-TZB | SLTS-M3   | SLEC-M3-A  | SLEC-M3-B | SNPXS-M3   | SNFXS-M3   |                                                         |
| SKX-15             | SSTS-M5                                   |        |           |            |           | SLEC-M4-A  | SLEC-M4-B |            |            |                                                         |
| SKX-20             | SSTS-M6                                   |        | SETS-M6   | SLT-M4-TZB | SLTS-M4   | SLEC-M5-A  | SLEC-M5-B | SNPXS-M4   | SNFXS-M4   |                                                         |
| SKX-25             | SSTS-M8                                   |        |           | SLT-M5-TZB | SLTS-M5   | SLEC-M6-A  | SLEC-M6-B | SNPXS-M5   | SNFXS-M5   |                                                         |
| SKX-30             |                                           |        |           | SLT-M6-TZB | SLTS-M6   | SLEC-M8-A  | SLEC-M8-B | SNPXS-M6   | SNFXS-M6   |                                                         |
| SKX-40             |                                           |        |           |            |           | SLEC-M10-A |           |            |            |                                                         |
| SKX-45             |                                           |        |           |            |           | SLEC-M12-A |           |            |            |                                                         |

## Part number specification

**SKX-25**



|                             |                                     |                                  |                              |                                               |
|-----------------------------|-------------------------------------|----------------------------------|------------------------------|-----------------------------------------------|
| 1 Individual Sales ➔ P.xxxx | Cleanroom Wash & Packaging ➔ P.xxxx | Screw Length Adjustment ➔ P.xxxx | Vibration Resistant ➔ P.xxxx | Modification process for captive use ➔ P.xxxx |
| 1 piece in 1 pack           | Not Available                       | Not Available                    | Not Available                | Not Available                                 |