



PFHX

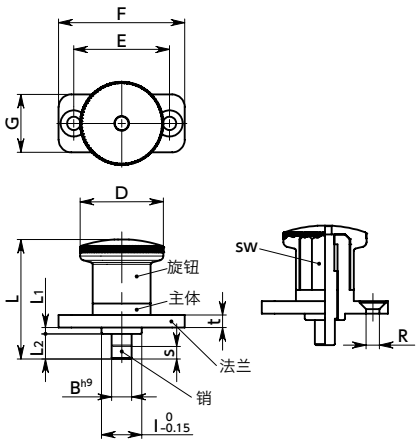

PFHXS

PFHXS-S

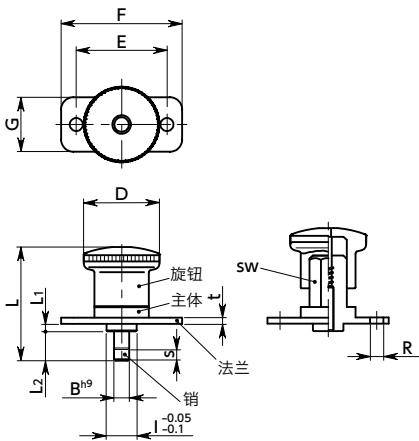

PFHX 主体、法兰：锌压铸件制/旋钮：塑料制

单位：mm

型号	B	s	D	I	L	L ₁	L ₂	sw	R	E	F	G	t	载荷(N) min./max.	销的剪切载荷(N)	质量(g)
PFHX-4-5	4	5	21	8	27.5	2	5	10	4.3	25	35	15	4	4 / 12	1160	23
PFHX-4-10	4	5	21	8	32.5	2	10	10	4.3	25	35	15	4	4 / 12	1160	23
PFHX-5-6	5	6	25	10	34	2.5	6	12	4.3	30	40	18	4	6 / 16	1820	39
PFHX-5-12	5	6	25	10	40	2.5	12	12	4.3	30	40	18	4	6 / 16	1820	40
PFHX-6-6	6	6	25	10	34	2.5	6	12	4.3	30	40	18	4	6 / 16	2620	39
PFHX-6-12	6	6	25	10	40	2.5	12	12	4.3	30	40	18	4	6 / 16	2620	41
PFHX-8-10	8	10	33	14	47.5	2.5	10	17	5.3	38	50	23	5	11 / 35	4660	94
PFHX-8-20	8	10	33	14	57.5	2.5	20	17	5.3	38	50	23	5	11 / 35	4660	98
PFHX-10-10	10	10	33	14	47.5	2.5	10	17	5.3	38	50	23	5	11 / 35	7280	96
PFHX-10-20	10	10	33	14	57.5	2.5	20	17	5.3	38	50	23	5	11 / 35	7280	102

无尘洗净・无尘包装 → P.xxxx

欢迎洽询

防松动 → P.xxxx

不可对应

激光刻印 → P.xxxx

可对应, 费用另计

● 材质、表面处理

RoHS

	PFHX	PFHXS	PFHXS-S
旋钮	尼龙6(亚光黑)	尼龙6(亚光黑)	相当于SCS13A
主体、法兰	锌压铸件 静电喷涂(亚光黑)	SUS304	SUS304
销	SUS303	SUS303	SUS303
弹簧	SUS301	SUS301	SUS301

PFHXS 主体、法兰：不锈钢制/旋钮：塑料制

单位：mm

型号	B	s	D	I	L	L ₁	L ₂	sw	R	E	F	G	t	载荷(N) min./max.	销的剪切载荷(N)	质量(g)
PFHXS-4-5	4	5	21	8	27.5	2	5	10	4.3	25	35	15	2	4 / 12	1160	23
PFHXS-4-10	4	5	21	8	32.5	2	10	10	4.3	25	35	15	2	4 / 12	1160	23
PFHXS-5-6	5	6	25	10	34	2.5	6	12	4.3	30	40	18	2	6 / 16	1820	40
PFHXS-5-12	5	6	25	10	40	2.5	12	12	4.3	30	40	18	2	6 / 16	1820	41
PFHXS-6-6	6	6	25	10	34	2.5	6	12	4.3	30	40	18	2	6 / 16	2620	40
PFHXS-6-12	6	6	25	10	40	2.5	12	12	4.3	30	40	18	2	6 / 16	2620	42
PFHXS-8-10	8	10	33	14	47.5	2.5	10	16.8	5.3	38	50	23	3	11 / 35	4660	100
PFHXS-8-20	8	10	33	14	57.5	2.5	20	16.8	5.3	38	50	23	3	11 / 35	4660	105
PFHXS-10-10	10	10	33	14	47.5	2.5	10	16.8	5.3	38	50	23	3	11 / 35	7280	103
PFHXS-10-20	10	10	33	14	57.5	2.5	20	16.8	5.3	38	50	23	3	11 / 35	7280	109

PFHXS-S 全不锈钢制

单位：mm

型号	B	s	D	I	L	L ₁	L ₂	sw	R	E	F	G	t	载荷(N) min./max.	销的剪切载荷(N)	质量(g)
PFHXS-4-5-S	4	5	21	8	27.5	2	5	10	4.3	25	35	15	2	4 / 12	1160	37
PFHXS-4-10-S	4	5	21	8	32.5	2	10	10	4.3	25	35	15	2	4 / 12	1160	37
PFHXS-5-6-S	5	6	25	10	34	2.5	6	12	4.3	30	40	18	2	6 / 16	1820	64
PFHXS-5-12-S	5	6	25	10	40	2.5	12	12	4.3	30	40	18	2	6 / 16	1820	65
PFHXS-6-6-S	6	6	25	10	34	2.5	6	12	4.3	30	40	18	2	6 / 16	2620	65
PFHXS-6-12-S	6	6	25	10	40	2.5	12	12	4.3	30	40	18	2	6 / 16	2620	66
PFHXS-8-10-S	8	10	33	14	47.5	2.5	10	16.8	5.3	38	50	23	3	11 / 35	4660	146
PFHXS-8-20-S	8	10	33	14	57.5	2.5	20	16.8	5.3	38	50	23	3	11 / 35	4660	150
PFHXS-10-10-S	10	10	33	14	47.5	2.5	10	16.8	5.3	38	50	23	3	11 / 35	7280	149
PFHXS-10-20-S	10	10	33	14	57.5	2.5	20	16.8	5.3	38	50	23	3	11 / 35	7280	155

● 型号指定

PFHXS-5-6-S

1