

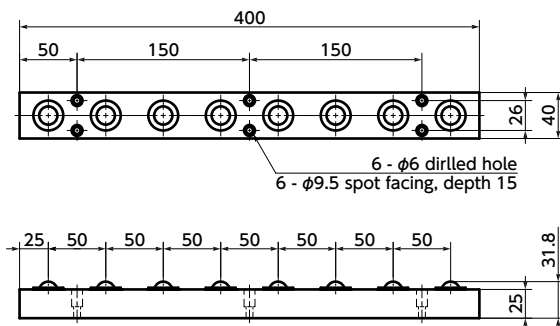


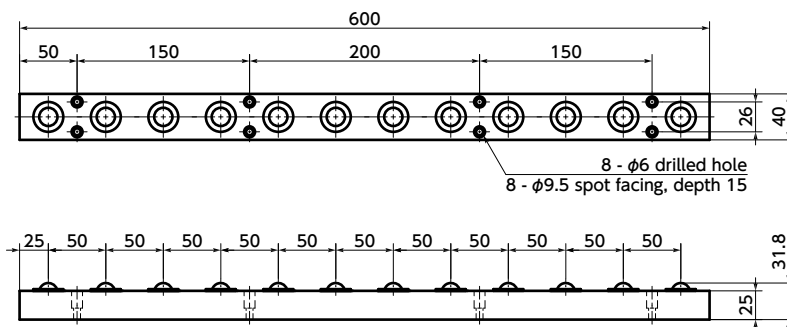

BRAPS Ball Roller Units - Press Fit Type

**BRAPS-200****BRAPS-400****BRAPS-600****BRAPS-S | BRAPS-N**

BRAPS-S Main Ball: Stainless Steel			BRAPS-N Main Ball: Polyacetal			Mass (g)
Part Number	Ball Roller Pack Part No.	Withstand Load of One Ball Roller (N)	Part Number	Ball Roller Pack Part No.	Withstand Load of One Ball Roller (N)	
BRAPS-200-S	BRUPS-24-S	343	BRAPS-200-N	BRUPS-24-N	69	618
BRAPS-400-S	BRUPS-24-S	343	BRAPS-400-N	BRUPS-24-N	69	1243
BRAPS-600-S	BRUPS-24-S	343	BRAPS-600-N	BRUPS-24-N	69	1873

- This unit product combines **BRUPS** (Press fit type) with an aluminum frame. The ball rollers can be aligned simply by attaching the frame.
- The bodies of the ball rollers are pressed in the frame, so the height can be reduced.
- **BRAPS-S** uses **BRUPS-S** ball rollers, which are all stainless steel.
- The main ball of **BRAPS-N** is made of polyacetal. Workpiece is not damaged.

Application

FPD production equipment, semiconductor devices, food production lines, and packaging lines

Material/Finish



	BRAPS-S	BRAPS-N
Frame	A6063 Anodized	A6063 Anodized
Ball Roller Body	SUS304	SUS304
Main Ball	SUS440C (Hardness 55HRC or Higher)	Polyacetal/White
Sub Ball	SUS440C (Hardness 55HRC or Higher)	SUS440C (Hardness 55HRC or Higher)

Part number specification

BRAPS-400-N

Product Code	Frame Length	Main Ball : "S" or "N"
--------------	--------------	------------------------

1 Individual Sales → P.xxxx

1 piece in 1 pack

Cleanroom Wash & Packaging → P.xxxx

Not Available

Screw Length Adjustment → P.xxxx

Not Available

Vibration Resistant → P.xxxx

Not Available