




SNBS(INCH) Hex Socket Button Head Cap Screws - Inch Thread

SUS Stainless steel

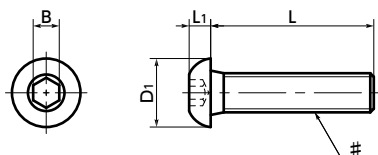

● Material/Finish



	SNBS(INCH)
Main Body	Stainless Steel (Grade : A2)
Strength Class	A2-50



- Socket button head cap screws with inch thread.
- ANSI B18.3 compliance.
- Install and remove by using **SKH(INCH)** Specialty Key. ➔ P.xxxx
- Also, products with special specifications such as dimensions, shapes, materials, surface treatments, cleanroom washing and special packaging are available. ➔ P.xxxx



● Application

Equipment and devices using inch screw specifications

Unit : inch

Part Number 	# Nominal of Thread	L 									D1	L1	B	Mass(g)	Qty per pack
SNBS-#4-40	No.4-40UNC	3 / 16	1 / 4	5 / 16	3 / 8	1 / 2					0.213	0.059	1 / 16	0.35 - 0.65	10
SNBS-#5-40	No.5-40UNC		1 / 4		3 / 8	1 / 2					0.238	0.066	5 / 64	0.53 - 0.85	10
SNBS-#6-32	No.6-32UNC		1 / 4	5 / 16	3 / 8	1 / 2	5 / 8	3 / 4			0.262	0.073	5 / 64	0.67 - 1.4	10
SNBS-#8-32	No.8-32UNC		1 / 4		3 / 8	1 / 2	5 / 8	3 / 4			0.312	0.087	3 / 32	1.1 - 2.1	10
SNBS-#10-24	No.10-24UNC		1 / 4		3 / 8	1 / 2	5 / 8	3 / 4	7 / 8	1	0.361	0.101	1 / 8	1.5 - 3.6	10
SNBS-#10-32	No.10-32UNF		1 / 4		3 / 8	1 / 2	5 / 8	3 / 4	7 / 8	1	0.361	0.101	1 / 8	1.5 - 3.8	10
SNBS-1 / 4-20	1/4-20UNC				3 / 8	1 / 2	5 / 8	3 / 4	7 / 8	1	0.437	0.132	5 / 32	3.3 - 6.4	10

- All dimensions are in inches.
- When purchasing less volume than one full bag, a separate handling fee is charged. For details, see the Sold Separately Service.

● Part number specification

SNBS-#4-40-1/4

◀1

◀2

1 Individual Sales ➔ P.xxxxx	2 Cleanroom Wash & Packaging ➔ P.xxxxx	3 Screw Length Adjustment ➔ P.xxxxx	4 Vibration Resistant ➔ P.xxxxx	5 Modification process for captive use ➔ P.xxxxx
Available / Add'l charge	Available / Add'l charge	Available / Add'l charge	Available / Add'l charge	Available / Add'l charge