




Seizing Prevention



Chemical-proof




SUS Stainless steel

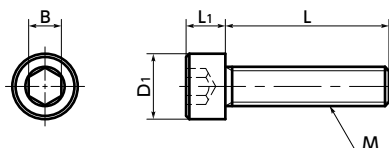

- Tightening property (reference)
Part Number : SNSS-M5 - 25-TF

➔ P.xxxx



- Excellent chemical resistance.
- The coating has excellent lubricating ability and is suitable for prevention of seizing.

● Application

Seizing prevention. FPD production equipment, semiconductor devices, printed circuit board etching devices, metallic surface treatment equipment and facilities, and chemical plants

● Material/Finish



	SNSS-TF
Main Body	SUSXM7 (S.S. Grade : A2) PTFE(Polytetrafluoroethylene) Coating
Strength Class	A2-70

Unit : mm

Part Number	M (Coarse)		L 												D ₁	L ₁	B	Mass (g)
	Nominal of Thread 	Pitch																
SNSS-M3-TF	M3	0.5	5	6	8	10	12	16	20					5.5	3	2.5	0.67 - 1.4	
SNSS-M4-TF	M4	0.7		6	8	10	12	16	20	25				7	4	3	1.5 - 3.2	
SNSS-M5-TF	M5	0.8			8	10	12	16	20	25				8.5	5	4	2.5 - 4.8	
SNSS-M6-TF	M6	1				10	12	16	20	25	30			10	6	5	4.7 - 8.3	
SNSS-M8-TF	M8	1.25						16	20	25	30	35		13	8	6	12 - 19	
SNSS-M10-TF	M10	1.5							20	25	30	35	40	16	10	8	23 - 33	

● Part number specification

SNSS-M6-25-TF

Product Code



Product Code

1 Individual Sales ➔ P.xxxx	Cleanroom Wash & Packaging ➔ P.xxxx	Screw Length Adjustment ➔ P.xxxx	Vibration Resistant ➔ P.xxxx	Modification process for captive use ➔ P.xxxx
1 piece in 1 pack	Available / Add'l charge	Not Available	Not Available	Please feel free to contact us