




● 为了与 **KNMS** 区分, **KNM** 的螺纹前端呈圆形。

- M3~M10的丰富螺纹尺寸。
- 可根据产品符号选择材质及类型。

产品符号	材质	类型
KNM	钢制	外螺纹
KNF	钢制	内螺纹
KNMS	不锈钢制	外螺纹
KNFS	不锈钢制	内螺纹

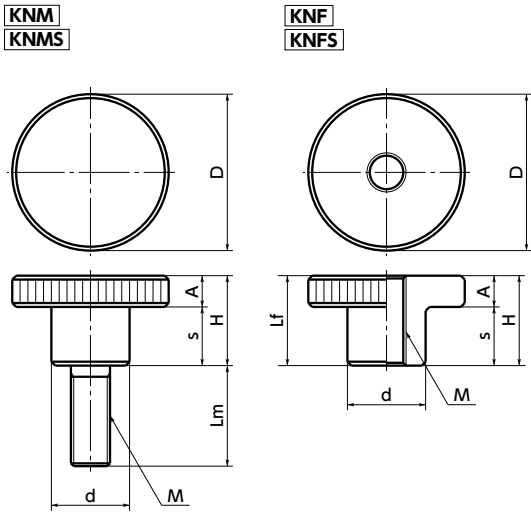

- 材质、表面处理

	KNM	KNF	KNMS / KNFS
主体	SWCH10R 磨光、镀铬	SUM22L 磨光、镀铬	SUS303*1

*1： **KNMS-36-M10** 为SUS304。

尺寸

KNM **KNMS** 外螺纹

型号 	型号 	D	M(粗牙)		H	s	A	d	质量(g)
			螺纹公称直径	螺距					
KNM-12-M3	KNMS-12-M3	12	M3	0.5	7.5	5	2.5	6	3 - 4
	KNMS-12-M4	12	M4	0.7	7.5	5	2.5	6	3 - 6
	KNMS-12-M5	12	M5	0.8	7.5	5	2.5	6	4 - 9
KNM-16-M4	KNMS-16-M4	16	M4	0.7	9.5	6	3.5	8	9 - 10
	KNMS-16-M5	16	M5	0.8	9.5	6	3.5	8	9 - 13
	KNMS-16-M6	16	M6	1	9.5	6	3.5	8	9 - 19
KNM-20-M5	KNMS-20-M5	20	M5	0.8	11.5	7.5	4	10	15 - 20
	KNMS-20-M6	20	M6	1	11.5	7.5	4	10	15 - 26
KNM-24-M6	KNMS-24-M6	24	M6	1	15	10	5	12	28 - 38
KNM-30-M8	KNMS-30-M8	30	M8	1.25	18	12	6	16	58 - 61
KNM-36-M10	KNMS-36-M10	36	M10	1.5	23	15	8	20	108 - 120

KNF **KNFS** 内螺纹

型号 	型号 	D	M(粗牙)		Lf	H	s	A	d	质量(g)
			螺纹公称直径	螺距						
KNF-12-M3	KNFS-12-M3	12	M3	0.5	7.5	7.5	5	2.5	6	3
KNF-16-M4	KNFS-16-M4	16	M4	0.7	9.5	9.5	6	3.5	8	7
KNF-20-M5	KNFS-20-M5	20	M5	0.8	11.5	11.5	7.5	4	10	13
KNF-24-M6	KNFS-24-M6	24	M6	1	15	15	10	5	12	23
KNF-30-M8	KNFS-30-M8	30	M8	1.25	18	18	12	6	16	45
KNF-36-M10	KNFS-36-M10	36	M10	1.5	23	23	15	8	20	86

KNM 钢制 **KNMS** 不锈钢制

型号 外螺纹	Lm(mm) 									
	6	10	16	20	25	30	35	40	50	70
KNM-12-M3	●	●	●							
KNM-16-M4	●	●	●							
KNM-20-M5		●	●	●						
KNM-24-M6		●	●	●	●	●				
KNM-30-M8			●	●	●	●				
KNM-36-M10				●	●	●		●		
KNMS-12-M3	●	●	●							
KNMS-12-M4	●	●	●	●				●		
KNMS-12-M5		●	●	●	●				●	
KNMS-16-M4	●	●	●	●				●		
KNMS-16-M5		●	●	●	●				●	
KNMS-16-M6		●	●	●	●	●	●			●
KNMS-20-M5		●	●	●	●				●	
KNMS-20-M6		●	●	●	●	●	●			●
KNMS-24-M6		●	●	●	●	●	●			●
KNMS-30-M8			●	●	●	●				
KNMS-36-M10				●	●	●		●		

- 型号指定

KNM-24-M6 - 20

外螺纹型  螺纹长度Lm请从表中标有●的尺寸中选择。

 无尘洗净・无尘包装 → P.xxxx	 螺纹组合 → P.xxxx	 螺纹切割 → P.xxxx	 防松动 → P.xxxx	 激光刻印 → P.xxxx
欢迎洽询	仅可对应内螺纹型, 费用另计	仅可对应外螺纹型, 费用另计	仅可对应外螺纹型, 费用另计	仅可对应不锈钢制品, 费用另计