
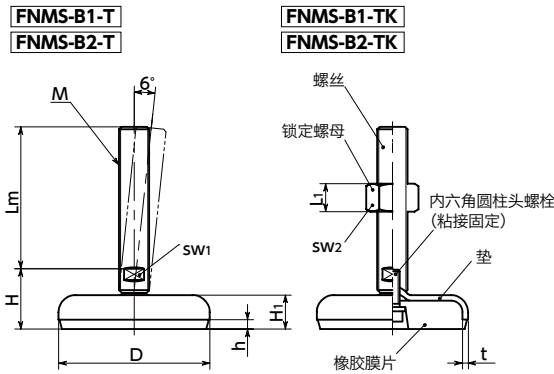




尺寸

FNMS-B1-T FNMS-B2-T 无锁定螺母 FNMS-B1-TK FNMS-B2-TK 带锁定螺母

单位：mm

型号 橡胶膜片：NBR	静态容许载荷 (N) *1	型号 橡胶膜片：TPE	静态容许载荷 (N) *1	M (粗牙)		D	H	H1	h	sw1	sw2	L1	t	质量 (g)
				螺纹公称直径	螺距									
FNMS-50-M16-B1-T	28000	FNMS-50-M16-B2-T	28000	M16	2	50	29	14.5	3.5	12			3	197 - 340
FNMS-60-M16-B1-T	28000	FNMS-60-M16-B2-T	25000	M16	2	60	30	16	4	12			3	247 - 390
FNMS-80-M16-B1-T	19000	FNMS-80-M16-B2-T	15000	M16	2	80	32	18	5	12			3	337 - 480
FNMS-80-M20-B1-T	19000	FNMS-80-M20-B2-T	15000	M20	2.5	80	33	18	5	15			3	417 - 681
FNMS-80-M24-B1-T	19000	FNMS-80-M24-B2-T	15000	M24	3	80	36	18	5	19			3	573 - 878
FNMS-100-M16-B1-T	17000	FNMS-100-M16-B2-T	14000	M16	2	100	34	20	6	12			3	497 - 640
FNMS-100-M20-B1-T	17000	FNMS-100-M20-B2-T	14000	M20	2.5	100	35	20	6	15			3	557 - 821
FNMS-100-M24-B1-T	17000	FNMS-100-M24-B2-T	14000	M24	3	100	38	20	6	19			3	713 - 1018
FNMS-120-M20-B1-T	25000	FNMS-120-M20-B2-T	22000	M20	2.5	120	39	22	6	15			4	887 - 1046
FNMS-120-M24-B1-T	25000	FNMS-120-M24-B2-T	22000	M24	3	120	42	22	6	19			4	1043 - 1195
FNMS-120-M30-B1-T	25000	FNMS-120-M30-B2-T	22000	M30	3.5	120	46	22	6	24			4	1193 - 1675
FNMS-50-M16-B1-TK	28000	FNMS-50-M16-B2-TK	28000	M16	2	50	29	14.5	3.5	12	24	14.8	3	226 - 369
FNMS-60-M16-B1-TK	28000	FNMS-60-M16-B2-TK	25000	M16	2	60	30	16	4	12	24	14.8	3	276 - 419
FNMS-80-M16-B1-TK	19000	FNMS-80-M16-B2-TK	15000	M16	2	80	32	18	5	12	24	14.8	3	366 - 509
FNMS-80-M20-B1-TK	19000	FNMS-80-M20-B2-TK	15000	M20	2.5	80	33	18	5	15	30	18	3	469 - 733
FNMS-80-M24-B1-TK	19000	FNMS-80-M24-B2-TK	15000	M24	3	80	36	18	5	19	36	21.5	3	665 - 970
FNMS-100-M16-B1-TK	17000	FNMS-100-M16-B2-TK	14000	M16	2	100	34	20	6	12	24	14.8	3	526 - 669
FNMS-100-M20-B1-TK	17000	FNMS-100-M20-B2-TK	14000	M20	2.5	100	35	20	6	15	30	18	3	609 - 873
FNMS-100-M24-B1-TK	17000	FNMS-100-M24-B2-TK	14000	M24	3	100	38	20	6	19	36	21.5	3	805 - 1110
FNMS-120-M20-B1-TK	25000	FNMS-120-M20-B2-TK	22000	M20	2.5	120	39	22	6	15	30	18	4	939 - 1098
FNMS-120-M24-B1-TK	25000	FNMS-120-M24-B2-TK	22000	M24	3	120	42	22	6	19	36	21.5	4	1135 - 1287
FNMS-120-M30-B1-TK	25000	FNMS-120-M30-B2-TK	22000	M30	3.5	120	46	22	6	24	46	25.6	4	1392 - 1874

*1：静态容许载荷为无橡胶膜片的值。也是螺丝垂直于垫的状态下的值。在螺丝带角度的状态下，会发生弯曲和屈曲应力，导致静态容许载荷变小。
表中数值非保证值，仅供参考。

无尘洗净・无尘包装 → P. xxxx	螺纹切割 → P. xxxx	防松动 → P. xxxx	激光刻印 → P. xxxx
不可对应	欢迎洽询	不可对应	欢迎洽询

● 材质、表面处理

	FNMS-B1-T	FNMS-B1-TK	FNMS-B2-T	FNMS-B2-TK
螺丝	SUS303	SUS303	SUS303	SUS303
垫	SUS304	SUS304	SUS304	SUS304
橡胶膜片	NBR (黑) 肖氏硬度 A80±5	NBR (黑) 肖氏硬度 A80±5	TPE (白) 肖氏硬度 A80±5	TPE (白) 肖氏硬度 A80±5
内六角圆柱头螺栓	不锈钢	不锈钢	不锈钢	不锈钢
锁定螺母	—	SUS304	—	SUS304

FNMS-B1-T 无锁定螺母 FNMS-B1-TK 带锁定螺母

型号 橡胶膜片：NBR	Lm (mm) 2				
	75	100	125	150	200
FNMS-50-M16-B1-T	●	●	●	●	●
FNMS-60-M16-B1-T	●	●	●	●	●
FNMS-80-M16-B1-T	●	●	●	●	●
FNMS-80-M20-B1-T	●	●	●	●	●
FNMS-80-M24-B1-T		●	●	●	●
FNMS-100-M16-B1-T	●	●	●	●	●
FNMS-100-M20-B1-T	●	●	●	●	●
FNMS-100-M24-B1-T		●	●	●	●
FNMS-120-M20-B1-T		●	●	●	●
FNMS-120-M24-B1-T		●	●	●	●
FNMS-120-M30-B1-T		●	●	●	●
FNMS-50-M16-B1-TK	●	●	●	●	●
FNMS-60-M16-B1-TK	●	●	●	●	●
FNMS-80-M16-B1-TK	●	●	●	●	●
FNMS-80-M20-B1-TK	●	●	●	●	●
FNMS-80-M24-B1-TK		●	●	●	●
FNMS-100-M16-B1-TK	●	●	●	●	●
FNMS-100-M20-B1-TK	●	●	●	●	●
FNMS-100-M24-B1-TK		●	●	●	●
FNMS-120-M20-B1-TK		●	●	●	●
FNMS-120-M24-B1-TK		●	●	●	●
FNMS-120-M30-B1-TK		●	●	●	●

FNMS-B2-T 无锁定螺母 FNMS-B2-TK 带锁定螺母

型号 橡胶膜片：TPE	Lm (mm) 2				
	75	100	125	150	200
FNMS-50-M16-B2-T	●	●	●	●	●
FNMS-60-M16-B2-T	●	●	●	●	●
FNMS-80-M16-B2-T	●	●	●	●	●
FNMS-80-M20-B2-T	●	●	●	●	●
FNMS-80-M24-B2-T		●	●	●	●
FNMS-100-M16-B2-T	●	●	●	●	●
FNMS-100-M20-B2-T	●	●	●	●	●
FNMS-100-M24-B2-T		●	●	●	●
FNMS-120-M20-B2-T		●	●	●	●
FNMS-120-M24-B2-T		●	●	●	●
FNMS-120-M30-B2-T		●	●	●	●
FNMS-50-M16-B2-TK	●	●	●	●	●
FNMS-60-M16-B2-TK	●	●	●	●	●
FNMS-80-M16-B2-TK	●	●	●	●	●
FNMS-80-M20-B2-TK	●	●	●	●	●
FNMS-80-M24-B2-TK		●	●	●	●
FNMS-100-M16-B2-TK	●	●	●	●	●
FNMS-100-M20-B2-TK	●	●	●	●	●
FNMS-100-M24-B2-TK		●	●	●	●
FNMS-120-M20-B2-TK		●	●	●	●
FNMS-120-M24-B2-TK		●	●	●	●
FNMS-120-M30-B2-TK		●	●	●	●

● 型号指定

FNMS-80-M16-75-B1-T

1 2 1

2 螺纹长度 Lm 请从表中标有 ● 的尺寸中选择。