


JGB 带磁铁六角螺栓



- 六角螺栓头部内置钕磁铁。
- 用于快速工件定位, 固定等用途。
- 所有产品均附带锁定螺母。

● 材质、表面处理

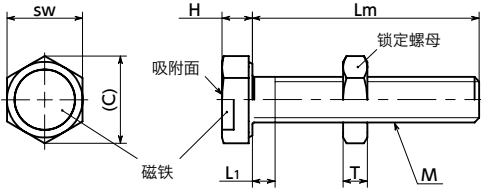

	JGB
磁铁	钕 镀镍
螺纹部	钢 三价铬酸盐处理
锁定螺母	钢 三价铬酸盐处理
耐热温度	80℃

单位 : mm

型号	吸附力 (N)	M (粗牙) 螺纹公称直径 1	螺距	Lm 2	C	sw	H	L1	T	质量 (g)
JGB-ND-M6-12	25	M6	1	12	11	10	4 _{-0.5} ⁰	3	3.2	5
JGB-ND-M6-16	25	M6	1	16	11	10	4 _{-0.5} ⁰	3	3.2	6
JGB-ND-M6-20	25	M6	1	20	11	10	4 _{-0.5} ⁰	3	3.2	7
JGB-ND-M6-25	25	M6	1	25	11	10	4 _{-0.5} ⁰	3	3.2	8
JGB-ND-M6-30	25	M6	1	30	11	10	4 _{-0.5} ⁰	3	3.2	9
JGB-ND-M8-16	50	M8	1.25	16	14.4	13	5.3 _{-0.5} ⁰	3.7	4	13
JGB-ND-M8-20	50	M8	1.25	20	14.4	13	5.3 _{-0.5} ⁰	3.7	4	14
JGB-ND-M8-25	50	M8	1.25	25	14.4	13	5.3 _{-0.5} ⁰	3.7	4	16
JGB-ND-M8-30	50	M8	1.25	30	14.4	13	5.3 _{-0.5} ⁰	3.7	4	17
JGB-ND-M8-40	50	M8	1.25	40	14.4	13	5.3 _{-0.5} ⁰	3.7	4	21
JGB-ND-M10-20	75	M10	1.5	20	17.8	17	6.4 _{-0.5} ⁰	4.5	5	25
JGB-ND-M10-25	75	M10	1.5	25	17.8	17	6.4 _{-0.5} ⁰	4.5	5	28
JGB-ND-M10-30	75	M10	1.5	30	17.8	17	6.4 _{-0.5} ⁰	4.5	5	31
JGB-ND-M10-40	75	M10	1.5	40	17.8	17	6.4 _{-0.5} ⁰	4.5	5	37
JGB-ND-M10-50	75	M10	1.5	50	17.8	17	6.4 _{-0.5} ⁰	4.5	5	42
JGB-ND-M12-25	110	M12	1.75	25	20	19	7.5 ₋₁ ⁰	5.2	6	44
JGB-ND-M12-30	110	M12	1.75	30	20	19	7.5 ₋₁ ⁰	5.2	6	48
JGB-ND-M12-40	110	M12	1.75	40	20	19	7.5 ₋₁ ⁰	5.2	6	55
JGB-ND-M12-50	110	M12	1.75	50	20	19	7.5 ₋₁ ⁰	5.2	6	62
JGB-ND-M12-60	110	M12	1.75	60	20	19	7.5 ₋₁ ⁰	5.2	6	69
JGB-ND-M16-30	145	M16	2	30	26.8	24	10 ₋₁ ⁰	6	8	93
JGB-ND-M16-40	145	M16	2	40	26.8	24	10 ₋₁ ⁰	6	8	104
JGB-ND-M16-50	145	M16	2	50	26.8	24	10 ₋₁ ⁰	6	8	118
JGB-ND-M16-60	145	M16	2	60	26.8	24	10 ₋₁ ⁰	6	8	131
JGB-ND-M16-80	145	M16	2	80	26.8	24	10 ₋₁ ⁰	6	8	157

● 型号指定

JGB-ND-M6-20

产品 钕 1 2